

Coaxial Isolator 700 ~ 2500MHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type	Temp.(°C)
5o0032320800900NK	800 ~ 900	23	1.2	0.3	N Female	-30 ~ +70
5o0032320860960NK	860 ~ 960	23	1.2	0.3	N Female	-30 ~ +70
5o00323209601215NK	960 ~ 1215	20	1.25	0.4	N Female	-30 ~ +70
5o003232014501700SK	1450 ~ 1700	20	1.25	0.4	SMA Female	-30 ~ +70
5o003232015002000SK	1500 ~ 2000	18	1.3	0.5	SMA Female	-30 ~ +70
5o003232016002000NK	1600 ~ 2000	20	1.25	0.4	N Female	-20 ~ +70
5o003232017002200SK	1700 ~ 2200	21	1.25	0.4	SMA Female	-30 ~ +70
5o003232017002400SK	1700 ~ 2400	18	1.3	0.6	SMA Female	-40 ~ +70
5o003232018002400SK	1800 ~ 2400	18	1.3	0.5	SMA Female	-40 ~ +85
5o003232020002500SK	2000 ~ 2500	20	1.25	0.4	SMA Female	-40 ~ +85

Basic Specifications

Dimension	32*32*18mm
Forward Power	200W/100W
Reverse Power	30W
Connector Type	SMA(Male/Female), N(Male/Female)
Storage Temperature	-55°C~+125°C
Impedance	50Ω

Overall Dimension(mm)

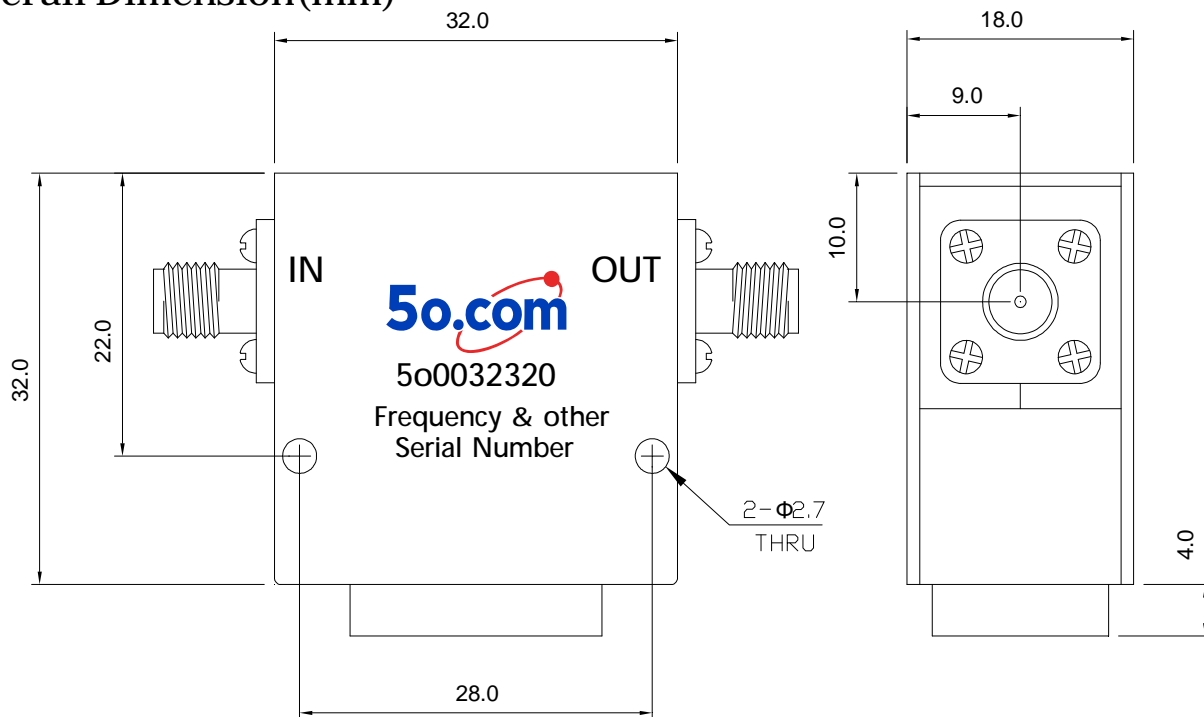

Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ The connector can be selected according to requirements, Connect type (SMA Male/Female, N Male/ Female, etc.)
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.