

Waveguide Isolator 33.0 ~ 38.0GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o06202513336	33.0 ~ 36.0	20	1.3	0.3	WR28(BJ320)
5o06202513337	33.0 ~ 37.0	20	1.3	0.3	WR28(BJ320)
5o06202513338	33.0 ~ 38.0	20	1.3	0.3	WR28(BJ320)

Basic Specifications

Dimension	20*25*10mm	Impedance	50Ω
Forward Power	25W	Operating Temperature	-40 ~ +85°C
Reverse Power	10W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

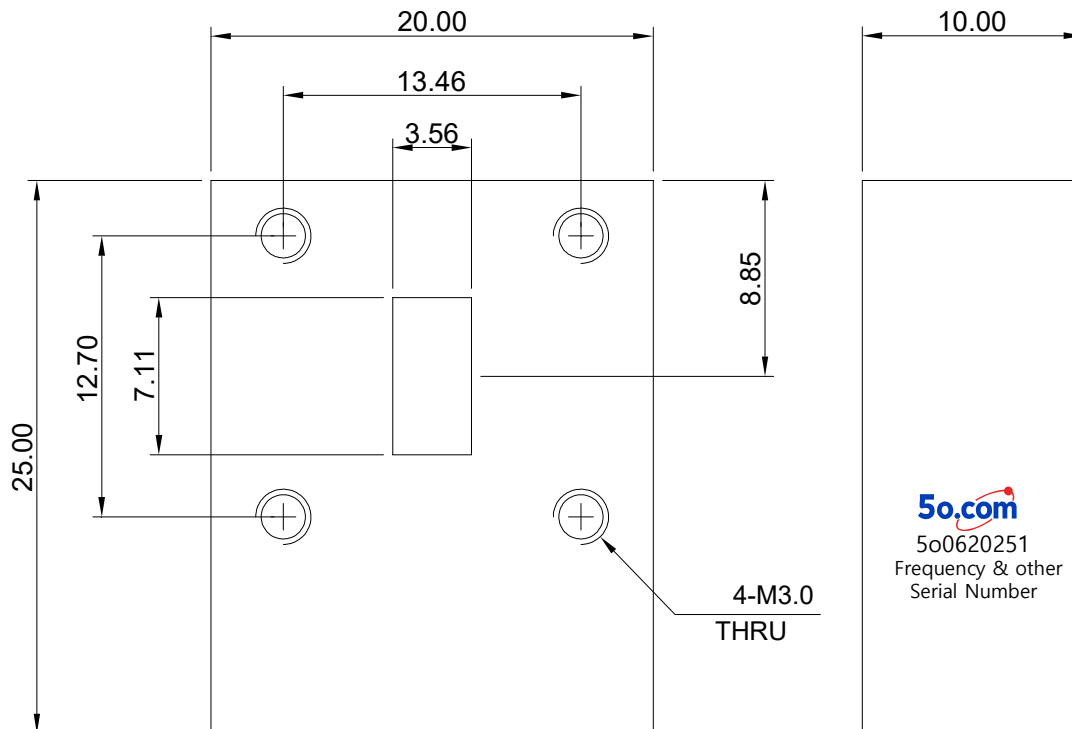

Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ The waveguide isolator shall be accurately mated with the matching waveguide flange.
- ◆ During installation, ensure the flange surface is clean and free of impurities (e.g., metal debris, dust). The flange connecting bolts shall be tightened evenly to prevent radio frequency (RF) leakage and excessive voltage standing wave ratio (VSWR) caused by poor sealing or uneven stress.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.