

Coaxial Isolator 1.85 ~ 3.8GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Military, Space and Commercial applications.
- ▶ Medical, Communication, Security.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o004040118538SK	1.85 ~ 3.8	17	1.35	0.7	SMA Female
5o004040118538NK	1.85 ~ 3.8	17	1.35	0.7	N Female

Basic Specifications

Dimension	40*40*20mm	Impedance	50Ω
Forward Power	100W	Operating Temperature	0 ~ +70°C
Reverse Power	30W	Storage Temperature	-55 ~ +125°C

Overall Dimension(mm)

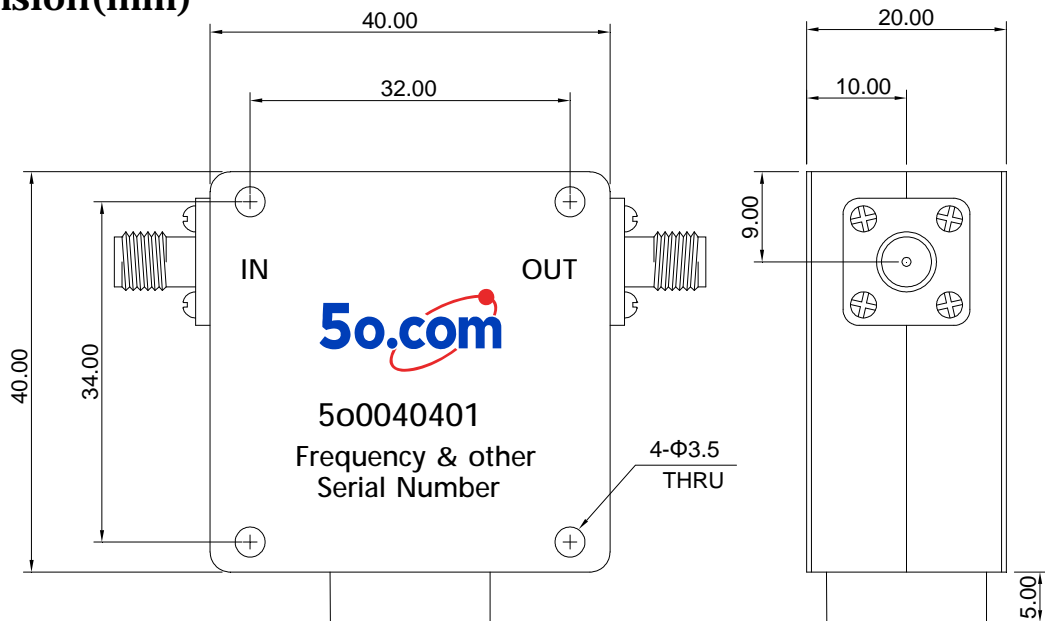

Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ The connector can be selected according to requirements, Connect type (SMA Male/Female, N Male/ Female, etc.)
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.