

Coaxial Isolator 250 ~ 1500MHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type	Temp.(°C)
5o0045800250260NK	250 ~ 260	20	1.25	0.5	N Female	-30 ~ +70
5o0045800250300SK	250 ~ 300	18	1.3	0.5	SMA Female	-30 ~ +70
5o0045800289359NK	289 ~ 359	20	1.25	0.5	N Female	-30 ~ +70
5o0045800300330NK	300 ~ 330	20	1.25	0.4	N Female	-30 ~ +70
5o0045800300400SK	300 ~ 400	18	1.3	0.7	SMA Female	-30 ~ +70
5o0045800350400SK	350 ~ 400	23	1.2	0.35	SMA Female	-30 ~ +70
5o0045800350500SK	350 ~ 500	16	1.4	0.6	SMA Female	-20 ~ +60
5o0045800400430NK	400 ~ 430	25	1.15	0.25	N Female	-30 ~ +70
5o0045800400500NK	400 ~ 500	20	1.25	0.35	N Female	-30 ~ +70
5o0045800400512NK	400 ~ 512	20	1.25	0.5	N Female	-30 ~ +70
5o0045800440470SK	440 ~ 470	25	1.15	0.25	SMA Female	-30 ~ +70
5o0045800440470NK	440 ~ 470	25	1.15	0.25	N Female	-30 ~ +70
5o0045800450600SK	450 ~ 600	18	1.3	0.5	SMA Female	-30 ~ +70
5o0045800470650NK	470 ~ 650	18	1.3	0.6	N Female	-30 ~ +70
5o0045800500700NK	500 ~ 700	18	1.3	0.5	N Female	-30 ~ +70
5o00458006901000SK	690 ~ 1000	18	1.3	0.5	SMA Female	-30 ~ +70
5o00458007001000SK	700 ~ 1000	18	1.3	0.5	SMA Female	-30 ~ +70
5o00458008501150SJSK	850 ~ 1150	20	1.25	0.4	SMA Male to SMA Female	-30 ~ +70
5o004580010001100NK	1000 ~ 1100	23	1.2	0.3	N Female	-30 ~ +70
5o004580012001300NJNK	1200 ~ 1300	23	1.2	0.3	N Male to N Female	-30 ~ +70

Basic Specifications

Dimension	45*80*24mm
Forward Power	300W
Reverse Power	250W
Connector Type	SMA (Male/Female), N(Male/Female)
Storage Temperature	-55°C~+125°C
Impedance	50Ω

Overall Dimension(mm)

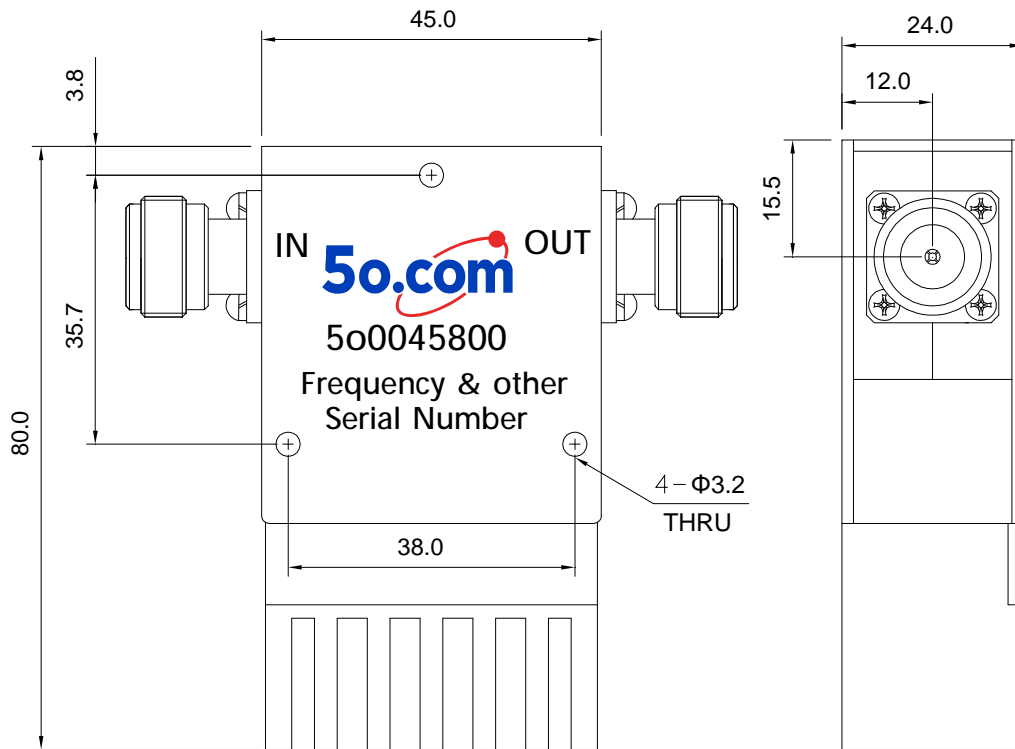

Instructions

Tolerances: $\pm 2\%$ unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ The connector can be selected according to requirements, Connect type (SMA Male/Female, N Male/ Female, etc.)
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.