

Waveguide Isolator 10.0 ~ 15.0GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o06444401012	10.0 ~ 12.0	23	1.2	0.3	WR75(BJ120)
5o06444401011	10.0 ~ 11.0	23	1.2	0.3	WR75(BJ120)
5o06444401071275	10.7 ~ 12.75	23	1.2	0.3	WR75(BJ120)
5o064444011124	11.0 ~ 12.4	20	1.2	0.35	WR75(BJ120)
5o0644440124138	12.4 ~ 13.8	20	1.2	0.35	WR75(BJ120)
5o064444013751425	13.75 ~ 14.25	23	1.2	0.3	WR75(BJ120)
5o06444401415	14.0 ~ 15.0	23	1.2	0.3	WR75(BJ120)

Basic Specifications

Dimension	44.5*44.5*38.1mm	Impedance	50Ω
Forward Power	100W	Operating Temperature	-40 ~ +85°C
Reverse Power	30W	Storage Temperature	-55~+125°C

Overall Dimension(mm, Tolerances: ±2% unless otherwise stated.)

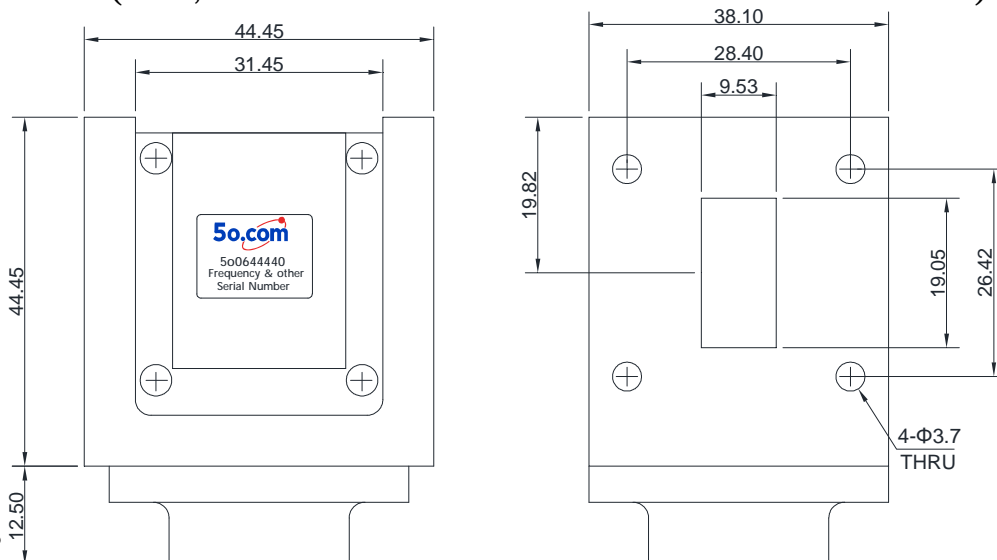

Instructions

- ◆ The waveguide isolator shall be accurately mated with the matching waveguide flange.
- ◆ During installation, ensure the flange surface is clean and free of impurities (e.g., metal debris, dust). The flange connecting bolts shall be tightened evenly to prevent radio frequency (RF) leakage and excessive voltage standing wave ratio (VSWR) caused by poor sealing or uneven stress.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.