

Drop in Isolator 6.0 ~ 18.0GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

| Part Number | Frequency Range (GHz) | Isolation Min(dB) | VSWR Max | Insertion Loss Max(dB) | Connector Type | Temp.(°C) |
|--------------|-----------------------|-------------------|----------|------------------------|----------------|-----------|
| 5o0116210618 | 6.0 ~ 18.0 | 10 | 1.9 | 1.5 | TAB | -30 ~ +70 |

Basic Specifications

| | | | |
|---------------|---------------|---------------------|-------------|
| Dimension | 16*21.5*14 mm | Impedance | 50Ω |
| Forward Power | 60W | Operating Temp | -30 ~ +70°C |
| Reverse Power | 10W | Storage Temperature | -55~+125°C |

Overall Dimension(mm)

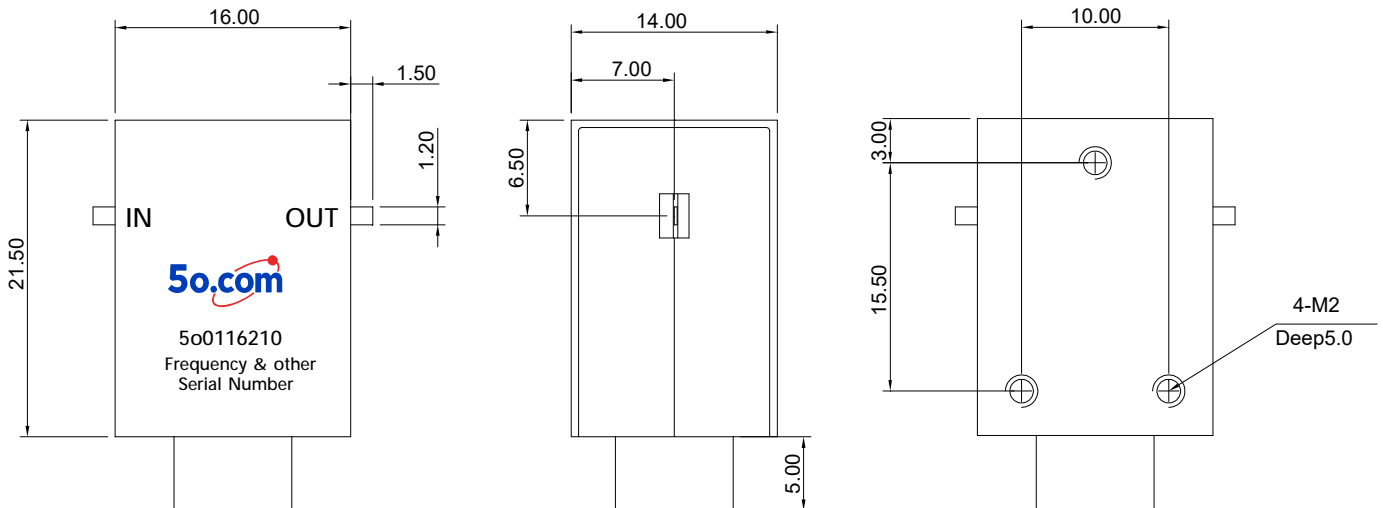

Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ Installing the embedded isolator/circulator, please use stainless steel or brass screws.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.