

# Dual Junction Microstrip Circulator 14.0 ~ 18.0GHz

## Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


## RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)				VSWR Max	Insertion Loss Max(dB)		Connector Type
		1-2	2-3	3-1	3-2		2-1	1-3	
5o258711415	14.0 ~ 15.0	20	20	30	20	1.25	0.45	0.85	Microstrip
5o258711418	14.0 ~ 18.0	16	17	28	17	1.35	0.65	1.1	Microstrip
5o258711517	15.0 ~ 17.0	20	20	30	20	1.25	0.5	0.9	Microstrip
5o25871155165	15.5 ~ 16.5	20	20	30	20	1.25	0.45	0.85	Microstrip
5o258711618	16.0 ~ 18.0	20	20	30	20	1.25	0.5	0.9	Microstrip
5o25871165175	16.5 ~ 17.5	20	20	30	20	1.25	0.45	0.85	Microstrip

## Basic Specifications

Dimension	8*7*2.5mm	Impedance	50Ω
Forward Power	10W	Operating Temperature	-55 ~ +85°C
Reverse Power	3W	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

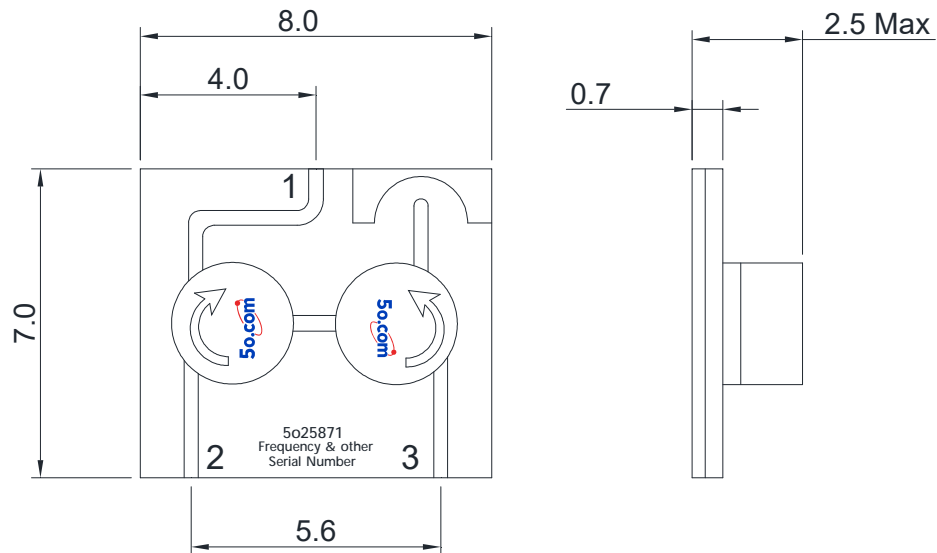

## Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ The microstrip isolator/circulator is installed via gold wire bonding.
- ◆ Avoid strong magnetic fields near the product during installation/use, as they may alter the bias magnetic field and affect performance.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.