Waveguide to Coaxial Adapter WR137 (BJ70)

Application

▶Testing and measuring equipment.
▶Radar and communication systems.
▶Satellite and wireless communication.
▶Compact wiring scenario.
▶It supports a one-year standard warranty.

RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR1374538817NK	5.38 ~ 8.17	0.3	1.25	WR137 (BJ70)	N Female
5o60WR1374538817SK	5.38 ~ 8.17	0.3	1.25	WR137 (BJ70)	SMA Female

Basic Specifications

Power	100W	Impedance	50Ω
Peak Power	3KW	Operating Temperature	-55 ~ +85℃
Connector Type (Waveguide)	WR137(BJ70)	Storage Temperature	-55~+125℃

Overall Dimension(mm)

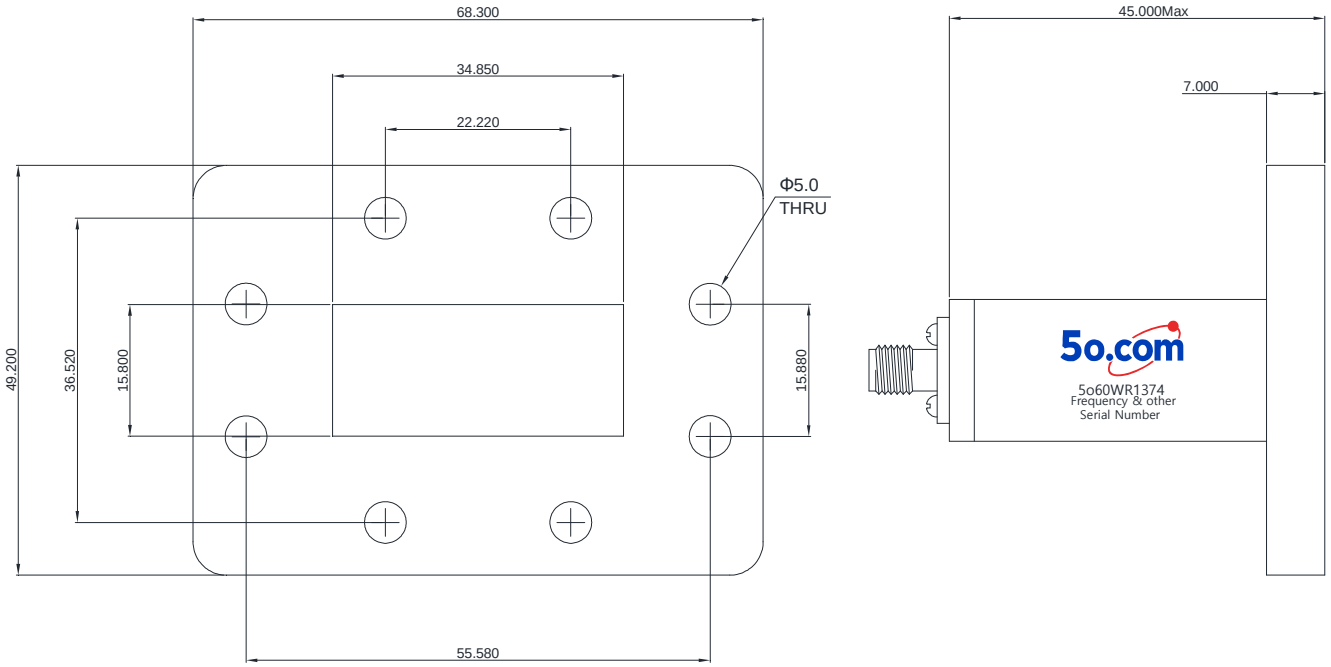

Tolerances: ±2% unless otherwise stated.