

Waveguide to Coaxial Adapter WR15 (BJ620)

Application

- ▶ Testing and measuring equipment.
 - ▶ Radar and communication systems.
 - ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
 - ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR150498755185K	49.8 ~ 75.5	1.0	2.0	WR15 (BJ620)	1.85mm Female

Basic Specifications

Power	3W	Impedance	50Ω
Peak Power	100W	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR15 (BJ620)	Storage Temperature	-55~+125°C

Overall Dimension(mm)

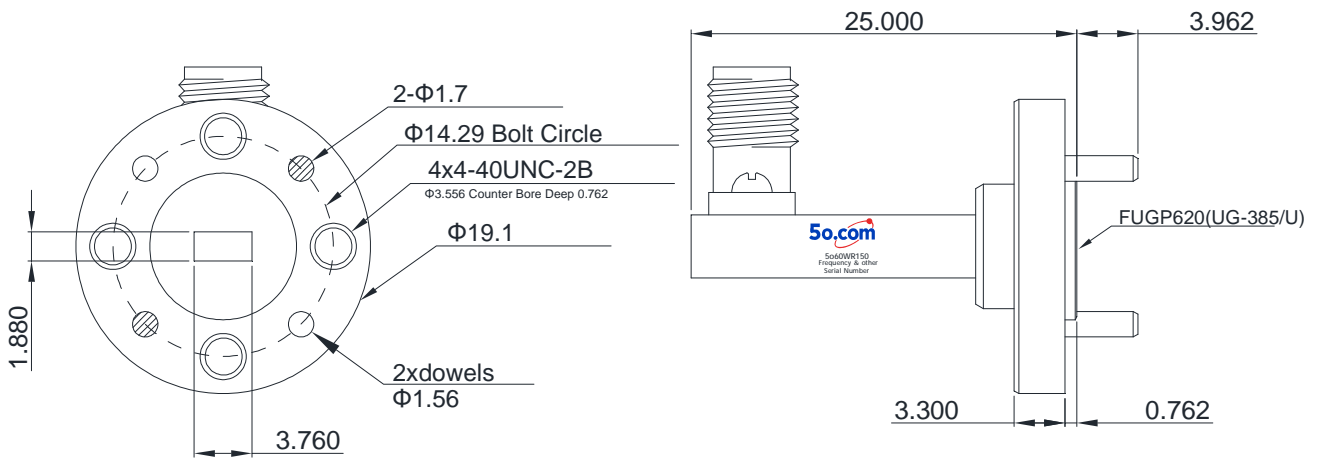

Tolerances: ±2% unless otherwise stated.