Waveguide to Coaxial Adapter WR2100 (BJ4)

Application

- ▶Testing and measuring equipment.
- ▶Radar and communication systems.
- ▶Satellite and wireless communication.
- ▶Compact wiring scenario.
- ▶It supports a one-year standard warranty.

RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide	Connector Type
5o60WR21000350530NK	350~530	0.12	1.25	WR2100 (BJ4)	N Female
5o60WR21000350530SK	350~530	0.12	1.25	WR2100 (BJ4)	SMA Female
5o60WR21000350530DK	350~530	0.12	1.25	WR2100 (BJ4)	7/16 Female

Basic Specifications

Power	100W	Impedance	50Ω
Peak Power	3W	Operating Temperature	-55 ~ +85℃
Connector Type (Waveguide)	WR2100(BJ4)	Storage Temperature	-55~+125℃

Overall Dimension(mm)

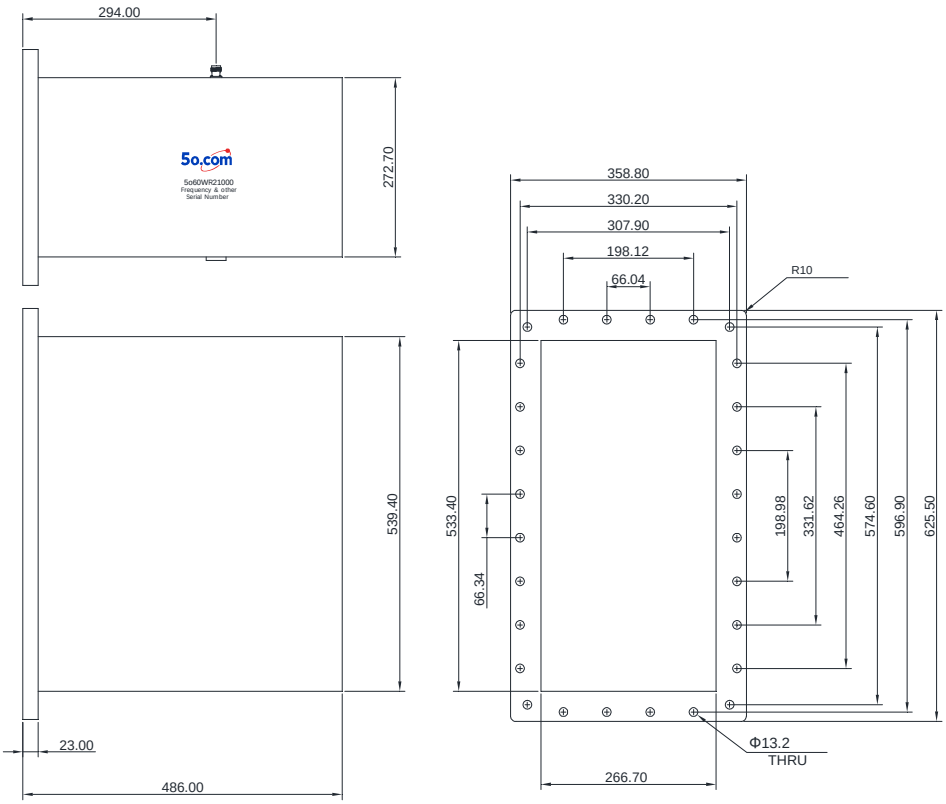

Tolerances: ±2% unless otherwise stated.