

Waveguide to Coaxial Adapter WR340 (BJ26)

Application

- ▶ Testing and measuring equipment.
- ▶ Radar and communication systems.
- ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR340021733NK	2.17 ~ 3.3	0.2	1.15	WR340 (BJ26)	N Female
5o60WR340021733SK	2.17 ~ 3.3	0.2	1.15	WR340 (BJ26)	SMA Female
5o60WR340021733DK	2.17 ~ 3.3	0.2	1.2	WR340 (BJ26)	7/16 Female

Basic Specifications

Power	100W	Impedance	50Ω
Peak Power	3W	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR340(BJ26)	Storage Temperature	-55~+125°C

Overall Dimension(mm)

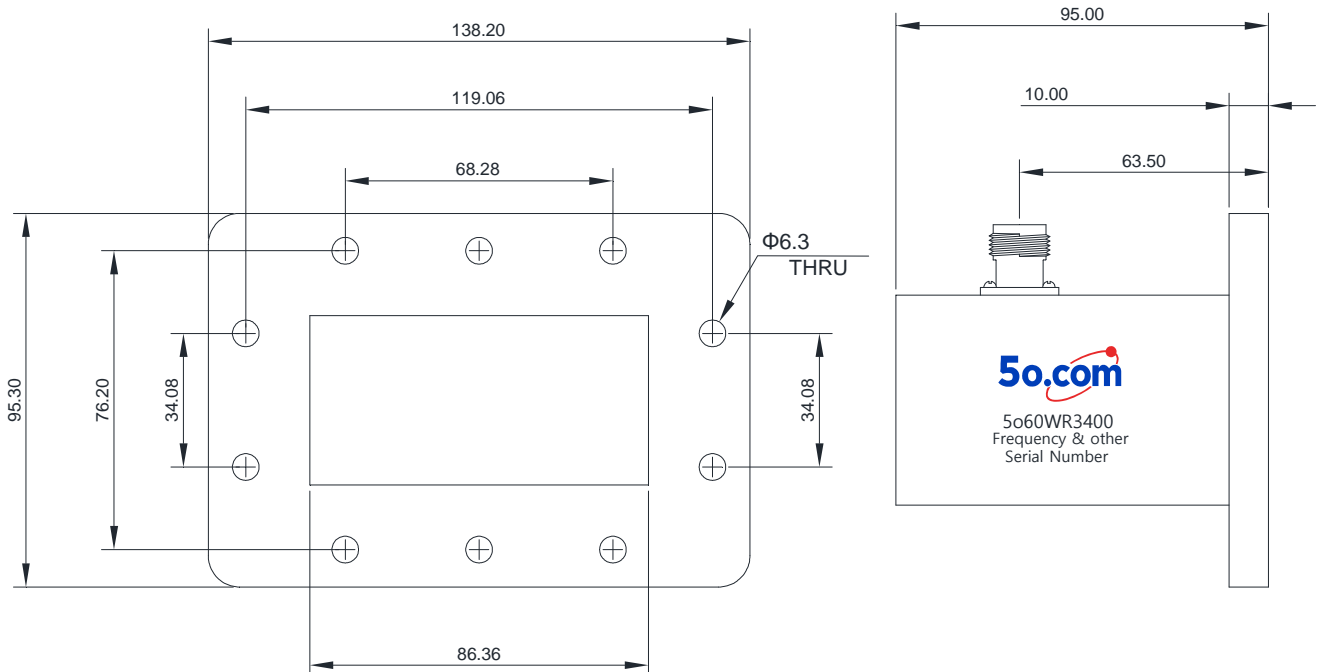

Tolerances: ±2% unless otherwise stated.