

## Waveguide to Coaxial Adapter WR62 (BJ140)

### Application

- ▶ Testing and measuring equipment.
- ▶ Radar and communication systems.
- ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
- ▶ It supports a one-year standard warranty.


### RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR62411918SK	11.9 ~ 18.0	0.3	1.25	WR62 (BJ140)	SMA Female

### Basic Specifications

Power	50W	Impedance	50Ω
Peak Power	1KW	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR62(BJ140)	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

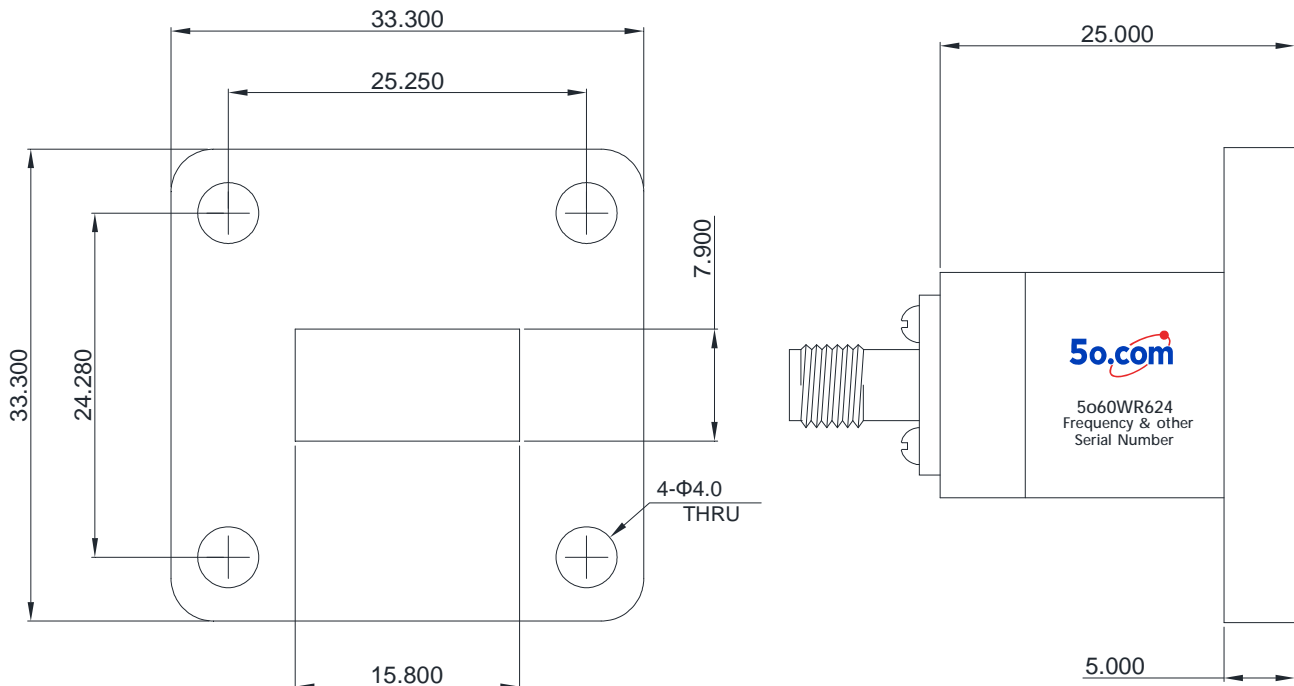

Tolerances:  $\pm 2\%$  unless otherwise stated.