

Dual Junction Coaxial Isolator 250 ~ 1300MHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type	Temp.(°C)
5o0396780300350NK	300 ~ 350	45	1.2	0.6	N Female	-30 ~ +70
5o0396780350400NK	350 ~ 400	45	1.2	0.6	N Female	-30 ~ +70
5o0396780350500NK	350 ~ 500	32	1.4	1.2	N Female	-30 ~ +70
5o0396780380470NK	380 ~ 470	40	1.25	0.7	N Female	-30 ~ +70
5o0396780400470NK	400 ~ 470	45	1.2	0.6	N Female	-30 ~ +70
5o0396780400430NK	400 ~ 430	50	1.15	0.5	N Female	-30 ~ +70
5o0396780440470NK	440 ~ 470	50	1.15	0.5	N Female	-30 ~ +70
5o0396780440470SK	440 ~ 470	50	1.15	0.5	SMA Female	-30 ~ +70
5o0396780470570NK	470 ~ 570	40	1.25	0.8	N Female	-30 ~ +70
5o0396780480520NK	480 ~ 520	45	1.2	0.6	N Female	-30 ~ +70
5o0396780570670NK	570 ~ 670	45	1.2	0.6	N Female	-30 ~ +70
5o0396780670770NK	670 ~ 770	45	1.2	0.6	N Female	-30 ~ +70
5o03967807001000NK	700 ~ 1000	36	1.3	1.2	N Female	-30 ~ +70
5o039678012001300NK	1200 ~ 1300	45	1.2	0.5	N Female	-30 ~ +70

Basic Specifications

Dimension	96*78*24mm
Forward Power	400W
Reverse Power	250W
Connector Type	N, SMA (Female/Male)
Storage Temperature	-55°C~+125°C
Impedance	50Ω

Overall Dimension(mm)

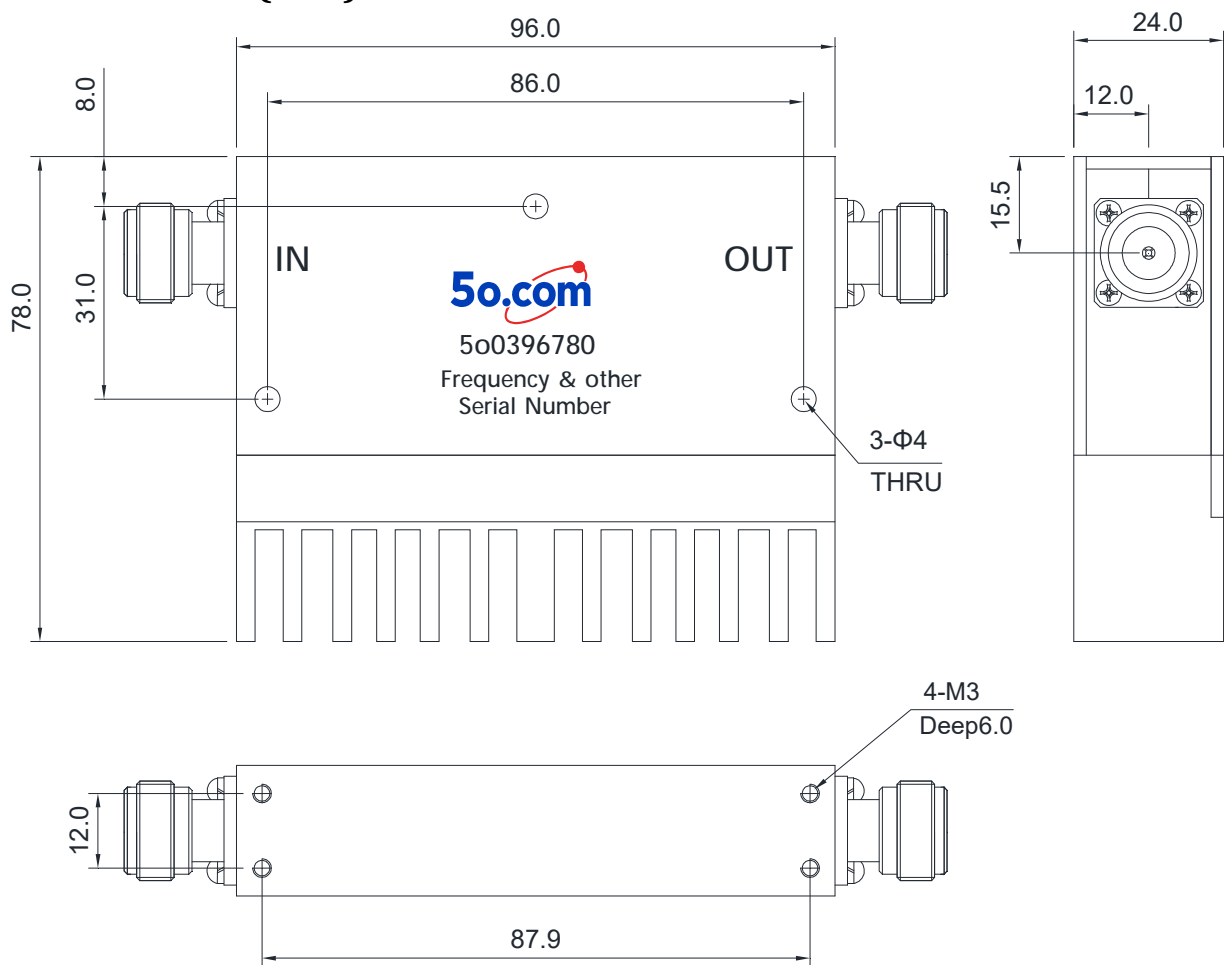

Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ The connector can be selected according to requirements, Connect type (SMA Male/Female, N Male/ Female, etc.)
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.