

# Waveguide to Coaxial Adapter WR650 (BJ14)

## Application

- ▶ Testing and measuring equipment.
- ▶ Radar and communication systems.
- ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR6500113173NK	1.13~1.73	0.2	1.2	WR650 (BJ14)	N Female
5o60WR6500113173SK	1.13~1.73	0.2	1.2	WR650 (BJ14)	SMA Female
5o60WR6500113173DK	1.13~1.73	0.2	1.2	WR650 (BJ14)	7/16 Female

## Basic Specifications

Power	100W	Impedance	50Ω
Peak Power	3W	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR650(BJ14)	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

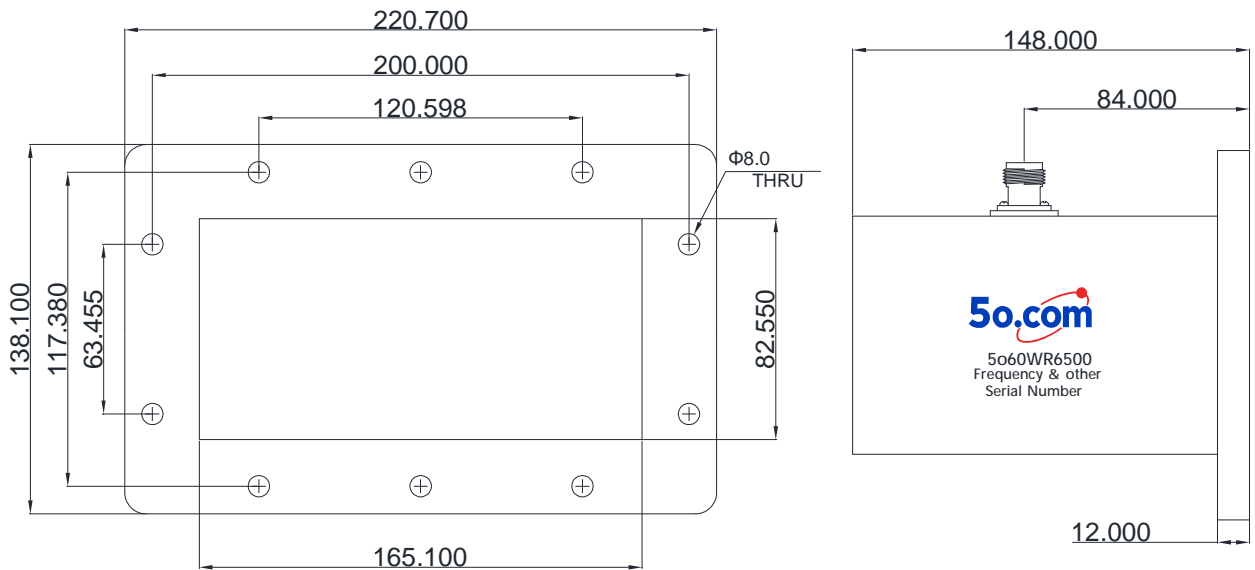

Tolerances: ±2% unless otherwise stated.