

# Waveguide to Coaxial Adapter WR75 (BJ120)

## Application

- ▶ Testing and measuring equipment.
- ▶ Radar and communication systems.
- ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR75498415SK	9.84 ~ 15.0	0.3	1.25	WR75 (BJ120)	SMA Female

## Basic Specifications

Power	50W	Impedance	50Ω
Peak Power	1KW	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR75(BJ120)	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

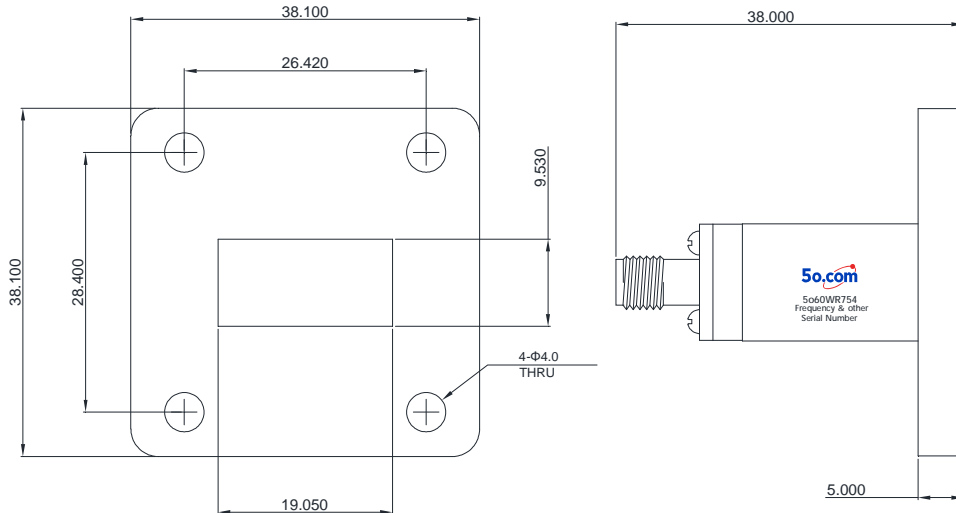

Tolerances: ±2% unless otherwise stated.