

Waveguide to Coaxial Adapter WR770 (BJ12)

Application

- ▶ Testing and measuring equipment.
- ▶ Radar and communication systems.
- ▶ Satellite and wireless communication.
- ▶ Compact wiring scenario.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Connector Type (Waveguide)	Connector Type
5o60WR77009601450NK	960~1450	0.12	1.2	WR770 (BJ12)	N Female
5o60WR77009601450SK	960~1450	0.12	1.2	WR770 (BJ12)	SMA Female
5o60WR77009601450DK	960~1450	0.12	1.25	WR770 (BJ12)	7/16 Female

Basic Specifications

Power	100W	Impedance	50Ω
Peak Power	3W	Operating Temperature	-55 ~ +85°C
Connector Type (Waveguide)	WR770(BJ12)	Storage Temperature	-55~+125°C

Overall Dimension(mm)

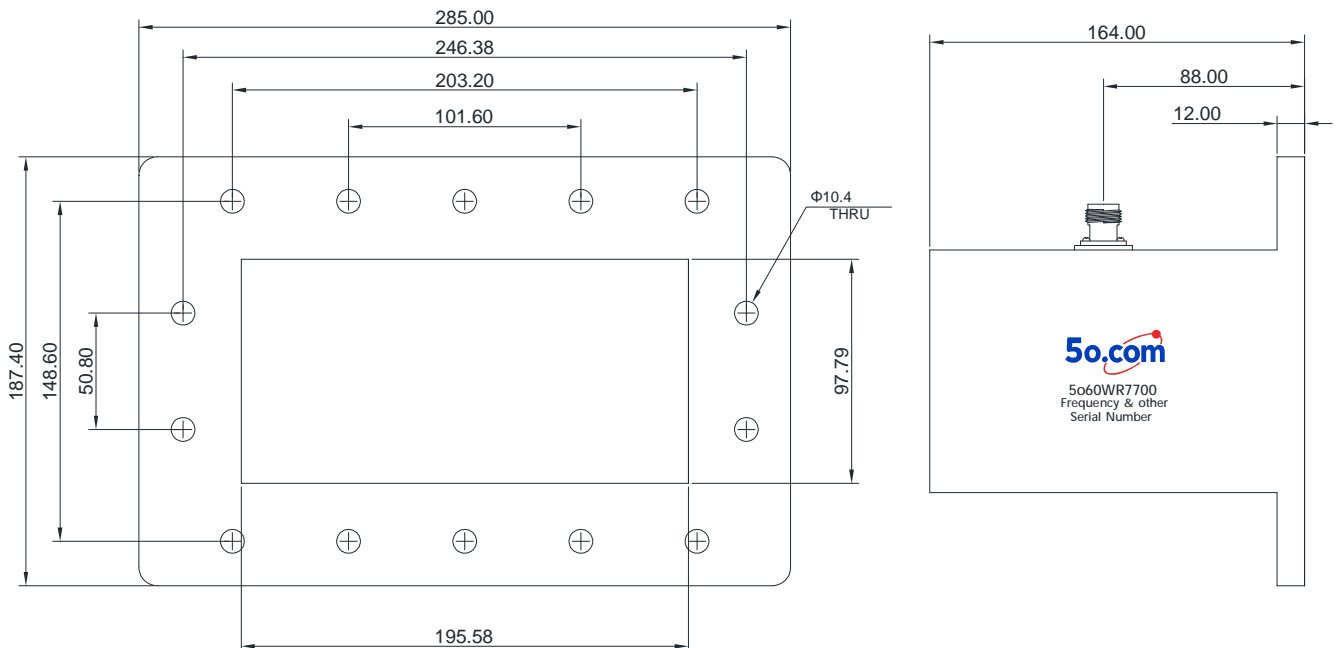

Tolerances: ±2% unless otherwise stated.