

500W Coaxial Circulator 1.0 ~2.0GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o10118140012NK	1.0 ~ 2.0	15	1.5	0.8	N Female
5o10118140012NJNKNK	1.0 ~ 2.0	15	1.5	0.8	N Male to N Female to N Female
5o10118140012NKNJNK	1.0 ~ 2.0	15	1.5	0.8	N Female to N Male to N Female

Basic Specifications

Dimension	118*140*100mm	Impedance	50Ω
Forward Power	500W	Operating Temperature	+10 ~ +60°C
Reverse Power	500W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

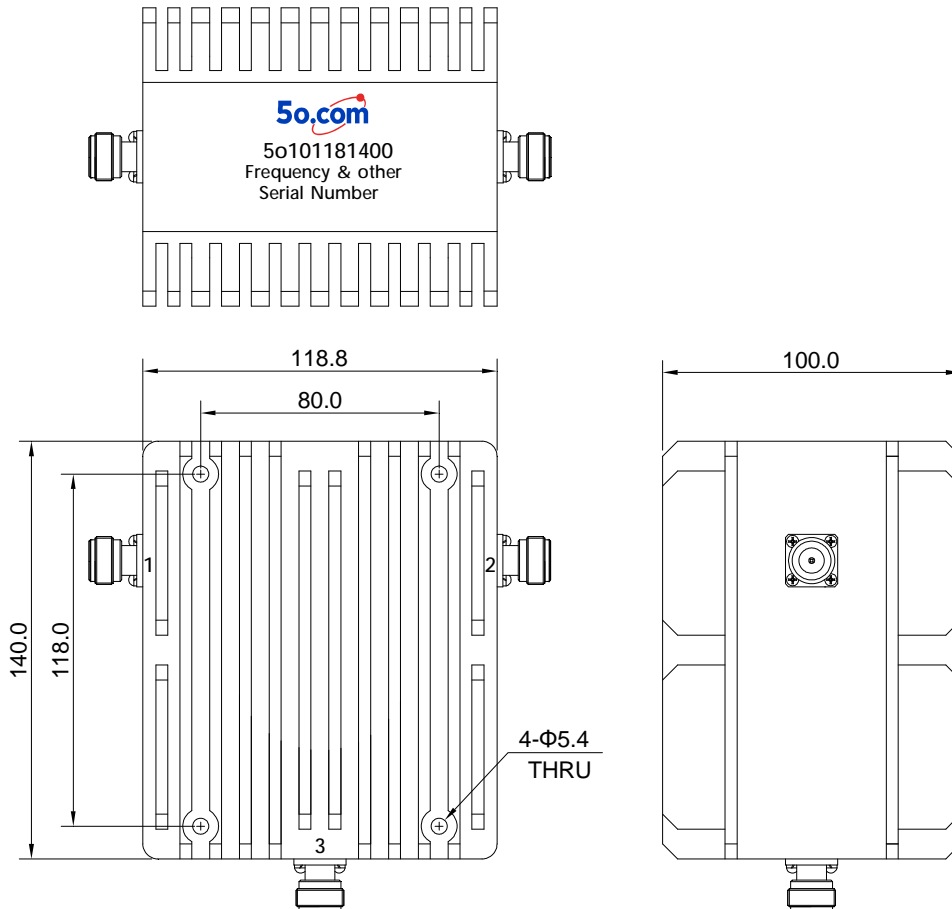

Tolerances: ±2% unless otherwise stated.