

Coaxial Circulator 2.0 ~ 4.0GHz

Application

- ▶ RF power amplifier protection.
- ▶ Medical, Communication, Security.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o103234024SK	2.0 ~ 4.0	17	1.35	0.6	SMA Female
5o103234024NK	2.0 ~ 4.0	17	1.35	0.6	N Female

Basic Specifications

Dimension	32*34*21mm	Impedance	50Ω
Forward Power	100W	Operating Temperature	+10 ~ +70°C
Reverse Power	100W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

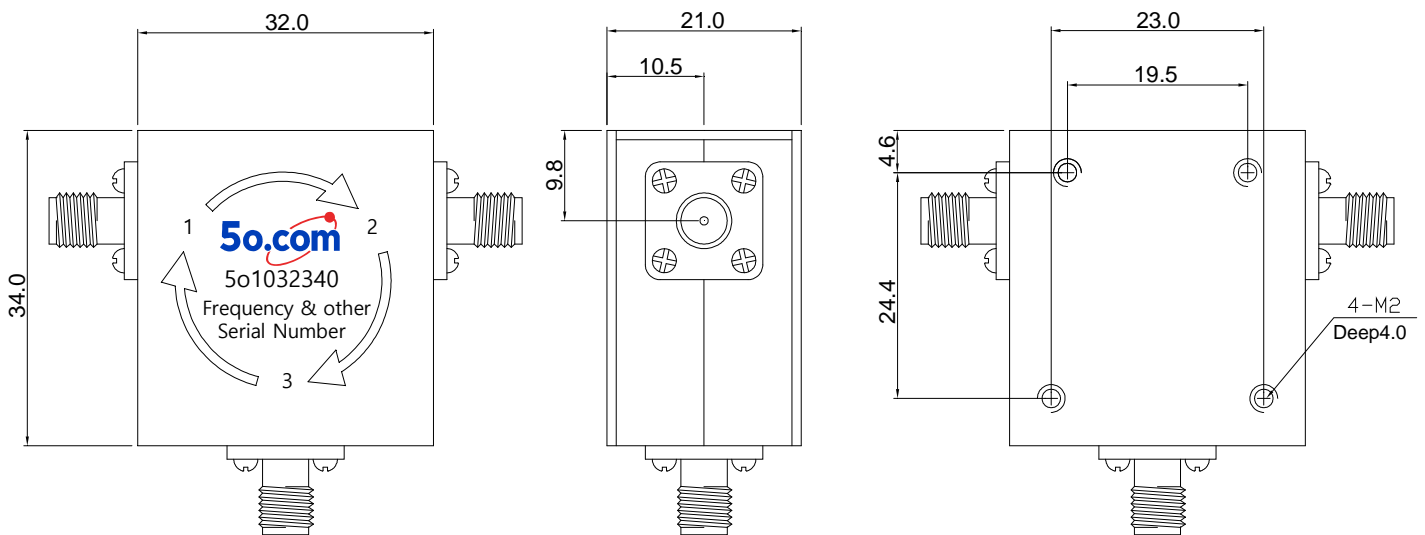

Instructions

Tolerances: $\pm 2\%$ unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ The connector can be selected according to requirements, Connect type (SMA Male/ Female, N Male/ Female, etc.)
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.