

4 Port Dual Junction Drop in Circulator 1.35 ~ 2.7GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Insertion Loss (1-2 & 3-4) Max(dB)	Connector Type	Temp.(°C)
5o12101490413527	1.35 ~ 2.7	36	1.3	1.0	TAB	0 ~ +70

Basic Specifications

Dimension	101.6*49.5*19mm	Impedance	50Ω
Forward Power	100W	Connector Type	TAB
Reverse Power	100W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

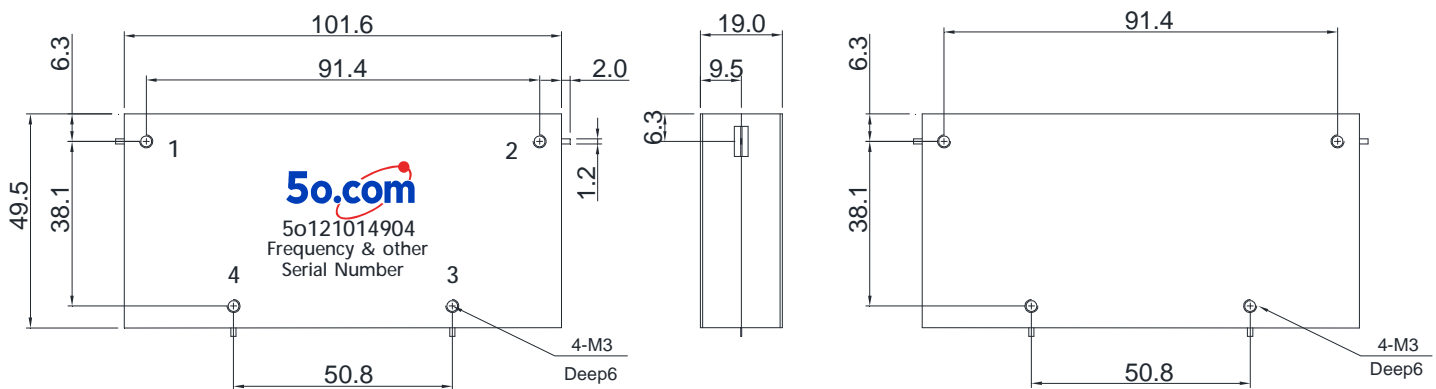

Instructions

Tolerances: $\pm 2\%$ unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ Installing the embedded isolator/circulator, please use stainless steel or brass screws.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.