

4 Port Dual Junction Drop in Circulator 45 ~ 270MHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.

RF Characteristics


Part Number	Frequency Range (MHz)	Isolation (2-1 & 4-3) Min(dB)	VSWR Max	Insertion Loss (1-2 & 3-4) Max(dB)	Connector Type	Temp.(°C)
5o1212060044550	45 ~ 50	36	1.3	3.0	TAB	-10 ~ +65
5o1212060044555	45 ~ 55	36	1.3	3.6	TAB	-10 ~ +65
5o1212060045075	50 ~ 75	40	1.25	3.6	TAB	-10 ~ +65
5o1212060045575	55 ~ 75	40	1.25	2.5	TAB	-10 ~ +65
5o1212060046065	60 ~ 65	40	1.25	2.0	TAB	-10 ~ +65
5o1212060046570	65 ~ 70	40	1.25	2.0	TAB	-10 ~ +65
5o1212060046888	68 ~ 88	36	1.3	2.5	TAB	-20 ~ +65
5o1212060047085	70 ~ 85	40	1.25	1.6	TAB	-20 ~ +65
5o1212060047090	70 ~ 90	40	1.25	2.0	TAB	-20 ~ +65
5o12120600480120	80 ~ 120	36	1.3	2.0	TAB	0 ~ +65
5o12120600485135	85 ~ 135	36	1.3	2.4	TAB	-10 ~ +65
5o12120600487108	87 ~ 108	40	1.25	1.2	TAB	-20 ~ +65
5o12120600487108P200	87 ~ 108	40	1.25	1.2	TAB	-20 ~ +65
5o12120600488138	88 ~ 138	36	1.3	2.0	TAB	-10 ~ +65
5o121206004100130	100 ~ 130	40	1.25	1.2	TAB	-30 ~ +70
5o121206004100150	100 ~ 150	40	1.25	2.0	TAB	-10 ~ +65
5o121206004108118	108 ~ 118	45	1.2	1.0	TAB	-30 ~ +70
5o121206004108118P200	108 ~ 118	45	1.2	1.0	TAB	-30 ~ +70
5o121206004112156	112 ~ 156	40	1.25	1.6	TAB	-30 ~ +70
5o121206004118137	118 ~ 137	45	1.2	1.0	TAB	-30 ~ +70
5o121206004118137P200	118 ~ 137	45	1.2	1.0	TAB	-30 ~ +70
5o121206004130180	130 ~ 180	40	1.25	1.2	TAB	-30 ~ +70
5o121206004136174	136 ~ 174	44	1.2	1.0	TAB	-30 ~ +70
5o121206004136174P200	136 ~ 174	44	1.2	1.0	TAB	-30 ~ +70
5o121206004148174P150	148 ~ 174	50	1.15	1.0	TAB	-30 ~ +70
5o121206004150200	150 ~ 200	40	1.25	1.2	TAB	-30 ~ +70

5o121206004150225	150 ~ 225	36	1.3	1.8	TAB	-30 ~ +70
5o121206004170200	170 ~ 200	40	1.25	1.0	TAB	-30 ~ +70
5o121206004170200P200	170 ~ 200	40	1.25	1.0	TAB	-30 ~ +70
5o121206004180220P	180 ~ 220	40	1.25	1.0	TAB	-30 ~ +70
5o121206004200270	200 ~ 270	40	1.25	1.4	TAB	-30 ~ +70

Basic Specifications

Dimension	120*60*28mm	Impedance	50Ω
Forward Power	200W	Connector Type	TAB
Reverse Power	100W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

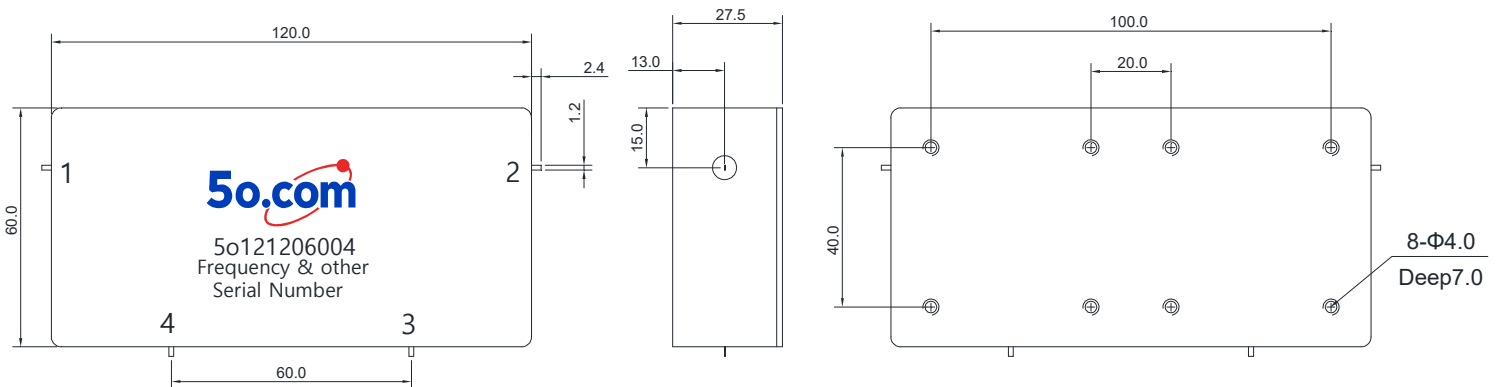

Instructions

Tolerances: $\pm 2\%$ unless otherwise stated.

- ◆ It can be dual junction or multiple for high isolation.
- ◆ Installing the embedded isolator/circulator, please use stainless steel or brass screws.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.