

Microstrip Circulator 6.0 ~ 18.0GHz

Application

- ▶ RF power amplifier protection.
- ▶ Digital, Satellite, Mobile Communication.
- ▶ Medical, Communication, Security.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type	Temp.(°C)
5o15771618	6.0 ~ 18.0	12	1.65	1	Microstrip	25±5
		10	1.75	1.2		-40 ~ +70

Basic Specifications

Dimension	7*7*3mm	Impedance	50Ω
Forward Power	AVG 20W Peak 40W	Operating Temperature	-40 ~ +70°C
Reverse Power	AVG 20W Peak 40W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

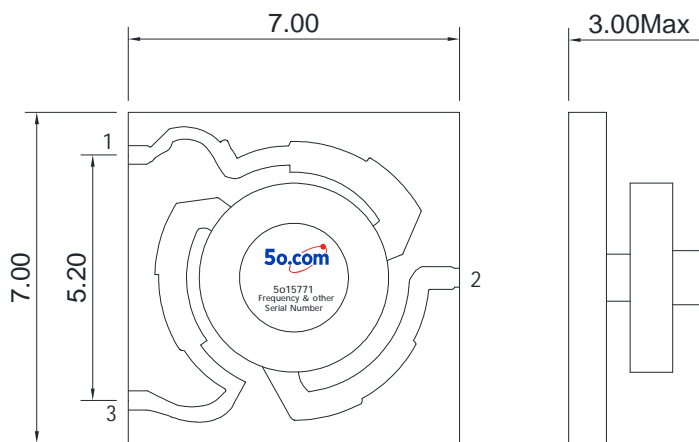

Instructions

Tolerances: ±2% unless otherwise stated.

- ◆ The microstrip isolator/circulator is installed via gold wire bonding.
- ◆ Avoid strong magnetic fields near the product during installation/use, as they may alter the bias magnetic field and affect performance.
- ◆ Only some common frequencies in the table can be produced according to the user's requirements.
- ◆ It supports a one-year standard warranty.