

100W Coaxial Attenuator DC-26.5GHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max
5o2010002653510	DC-26.5GHz	100W	10 dB	+2.5dB	1.45
				-1.5dB	
5o2010002653520			20 dB	+2.5dB	1.45
				-1.5dB	
5o2010002653530			30 dB	+2.5dB	1.45
				-1.5dB	
5o2010002653540			40 dB	+2.5dB	1.45
				-1.5dB	

Basic Specifications


Impedance	50Ω	Connector Type	3.5mm Male to Female
Power	100W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

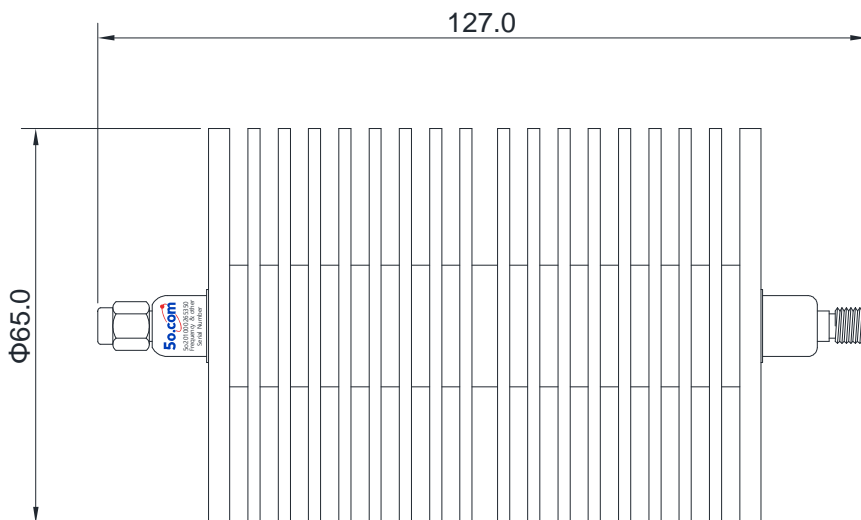

Tolerances: ±2% unless otherwise stated.

Power Derating Diagram

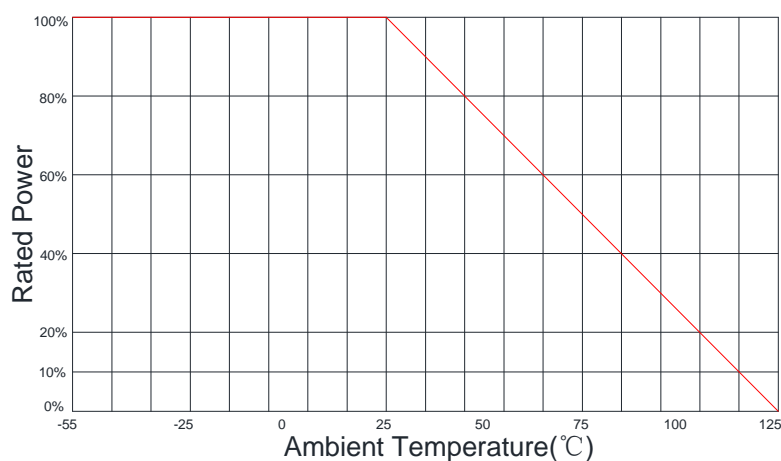

Notes

- ◆ Coaxial attenuator impedance matched to 50Ω.
- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ For products with a power of over 50W, pay attention to the direction during use and strictly avoid reverse connection.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.