

2000W Coaxial Attenuator DC-4.2GHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ Military, Space and Commercial applications.


RF Characteristics

Part Number	Frequency range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max	Connector Type
5o202000242D40	DC-4.2GHz	2000W	40 dB	±2.0 dB	1.4	7/16 Male to 7/16 Female
5o202000242DJNK50			50 dB	±2.5 dB	1.4	7/16 Male to N Female
5o202000242DKNK60			60 dB	±2.5 dB	1.4	7/16 Female to N Female

Basic Specifications


Impedance	50Ω	Storage Temperature	-55~+125°C
-----------	-----	---------------------	------------

Overall Dimension(mm)

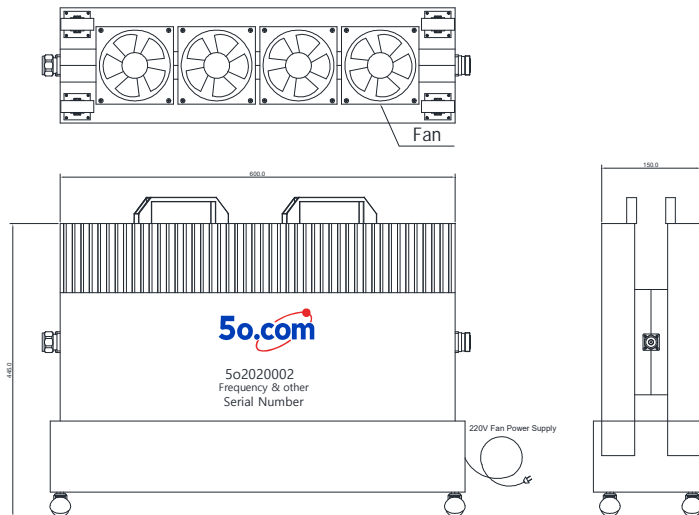

Tolerances: ±2% unless otherwise stated.

Power Derating Diagram

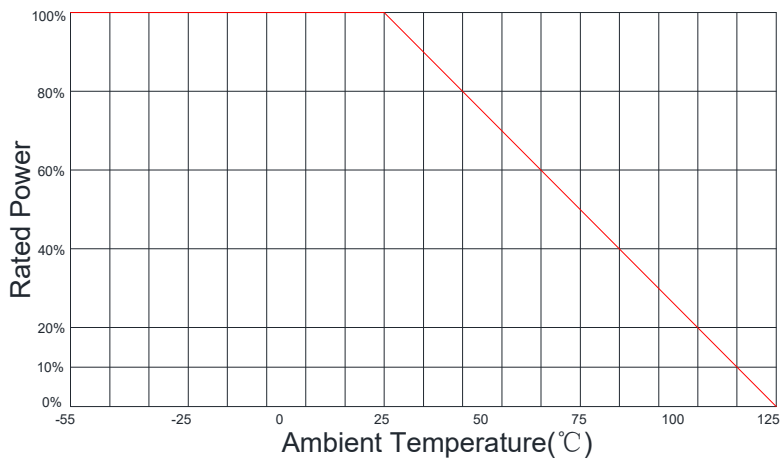

Notes

- ◆ Coaxial attenuator impedance matched to 50Ω.
- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ For products with a power of over 50W, pay attention to the direction during use and strictly avoid reverse connection.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.