

## 25W Coaxial Attenuator DC-12.4GHz

### Application

► Wireless communication system.

► Testing and measuring equipment.

► Radar and satellite systems.

► Military, Space and Commercial applications.


### RF Characteristics

Part Number	Frequency range	Power	Attenuation Value	Attenuation Tolerance	VSWR Max
5o20250124S3	DC-12.4GHz	25W	3 dB	±1.0 dB	1.4
5o20250124S6			6 dB	±1.0 dB	1.4
5o20250124S10			10 dB	±1.0 dB	1.4
5o20250124S20			20 dB	±1.0 dB	1.4
5o20250124S30			30 dB	±1.2 dB	1.4
5o20250124S40			40 dB	±1.3 dB	1.4

### Basic Specifications


Impedance	50Ω	Connector Type	SMA Male to Female
Power	25W	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

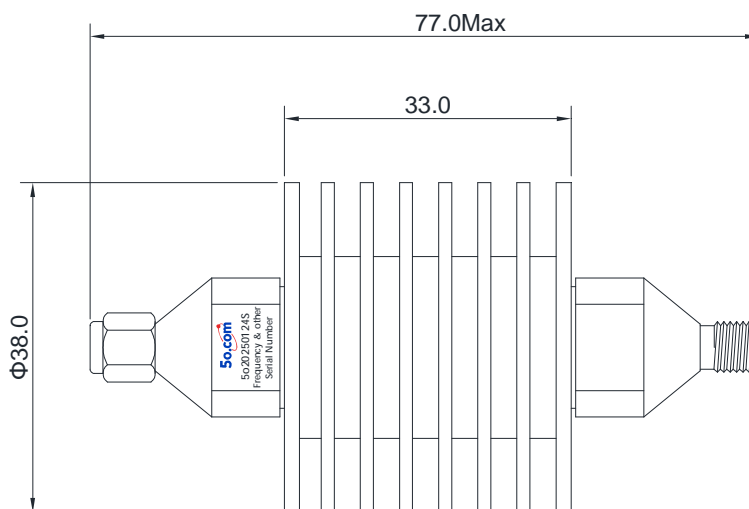

Tolerances: ±2% unless otherwise stated.

## Power Derating Diagram

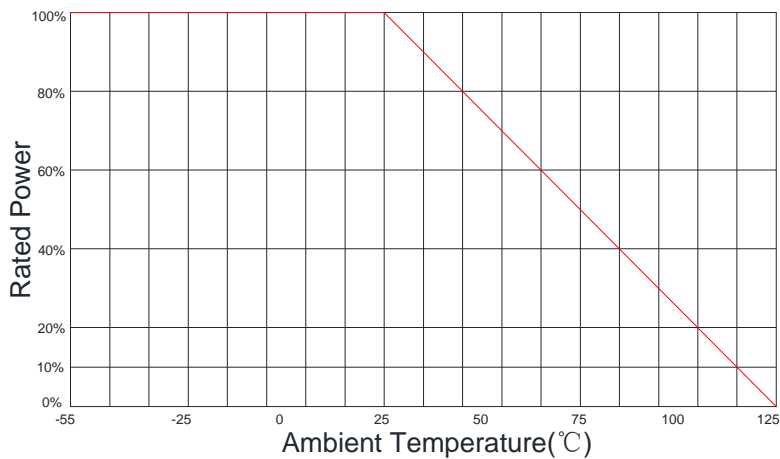

### Notes

- ◆Coaxial attenuator impedance matched to 50Ω.
- ◆If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆For products with a power of over 50W, pay attention to the direction during use and strictly avoid reverse connection.
- ◆Custom design is available upon request.
- ◆It supports a one-year standard warranty.