

## 2W Coaxial Termination DC-12.4GHz


### Application

- ▶ Wireless communication system.
- ▶ Testing and measuring equipment.
- ▶ Radar and satellite systems.
- ▶ Military, Space and Commercial applications.

### RF Characteristics


Part Number	Frequency range	Power	VSWR Max	Connector Type	Impedance
5o2120124SJ	DC-12.4GHz	2W	1.2	SMA Male	50 Ω
5o2120124SK	DC-12.4GHz	2W	1.2	SMA Female	50 Ω

### Overall Dimension (mm)

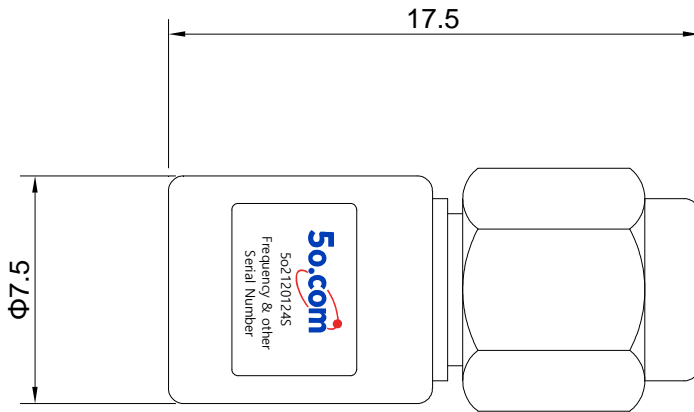

Tolerances: ±2% unless otherwise stated.

### Power Derating Diagram

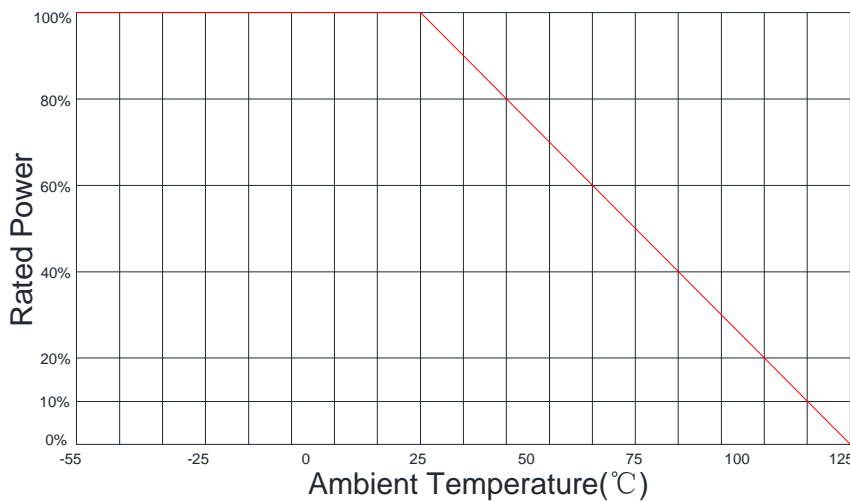

### Notes

- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.