

30W Coaxial Termination DC-3GHz


Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ Military, Space and Commercial applications.

RF Characteristics


| Part Number | Frequency range | Power | VSWR Max | Connector Type | Impedance |
|-------------|-----------------|-------|----------|----------------|-------------|
| 5o213003NJ | DC-3GHz | 30W | 1.15 | N Male | 50 Ω |
| 5o213003NK | DC-3GHz | 30W | 1.15 | N Female | 50 Ω |

Overall Dimension (mm)

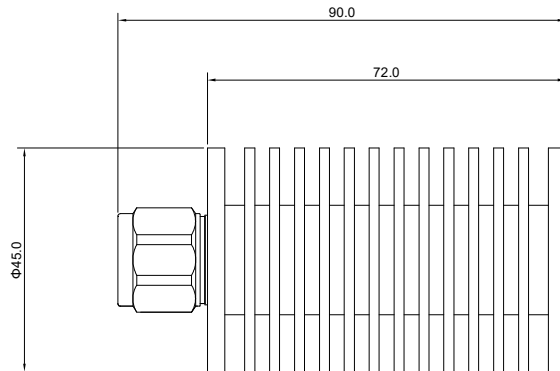

Tolerances: $\pm 2\%$ unless otherwise stated.

Power Derating Diagram

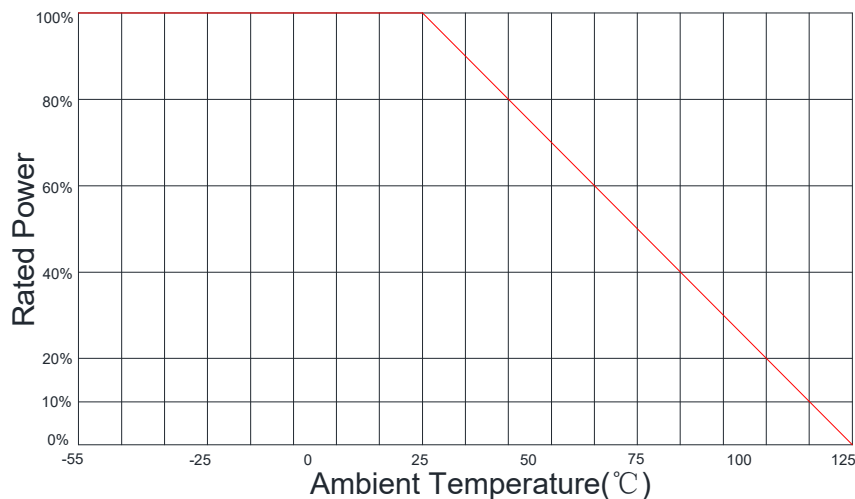

Notes

- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.