

30W Coaxial Termination DC-6GHz


Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ Military, Space and Commercial applications.

RF Characteristics


| Part Number | Frequency range | Power | VSWR Max | Connector Type | Impedance |
|-------------|-----------------|-------|----------|----------------|-----------|
| 5o213006NJ | DC-6GHz | 30W | 1.25 | N Male | 50 Ω |
| 5o213006NK | DC-6GHz | 30W | 1.25 | N Female | 50 Ω |

Overall Dimension (mm)

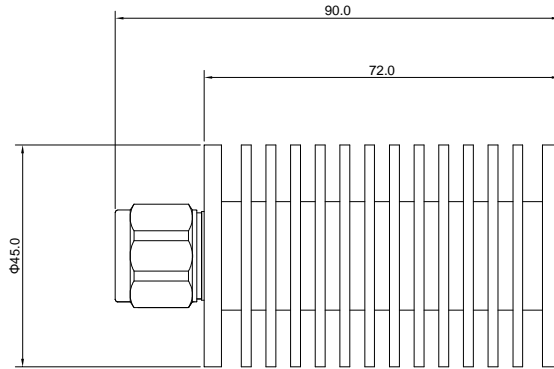

Tolerances: ±2% unless otherwise stated.

Power Derating Diagram

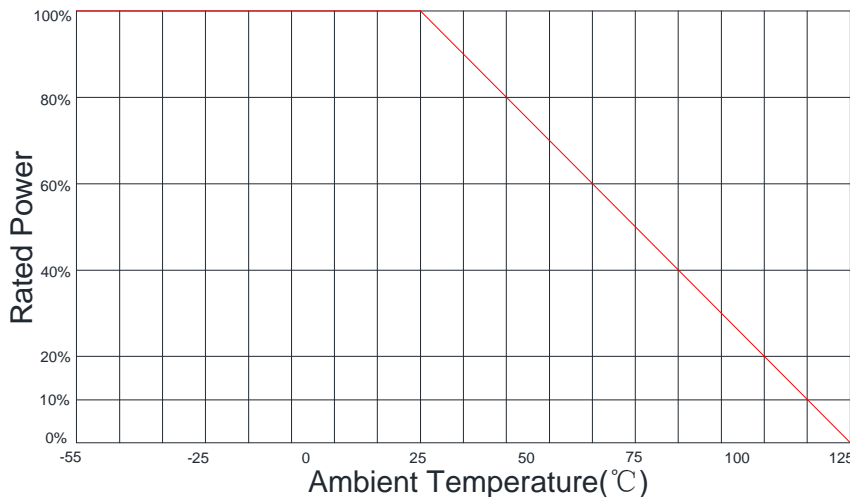

Notes

- ◆ If necessary, the product shall be air-cooled for auxiliary heat dissipation.
- ◆ Custom design is available upon request.
- ◆ It supports a one-year standard warranty.