

# 330 to 520MHz 2 TX Combiner

## Application

- ▶ Base Stations & Antenna feeds.
- ▶ Remote control and Internet of Things devices.
- ▶ Military, Space and Commercial applications.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)	Frequency Separation	Insertion Loss(dB)	Isolation Min(dB)	VSWR Max
5o2463301700xxxxxxxxNK	330 ~ 520	≥250 KHz	2.5 ~ 3.6dB	65dB Min. @TX-TX 55dB Min. @ANT-TX	1.25:1 Max. @Input 1.5:1 Max. @Output

## Basic Specifications

Number of Channels	N Female @2xTX    N Female @1xANT
Input Power	50W
Tuning Range	5MHz
Dimension	330*170*500mm
Operating Temperature	-10~+65°C
Storage Temperature	-55~+125°C

## Overall Dimension(mm)

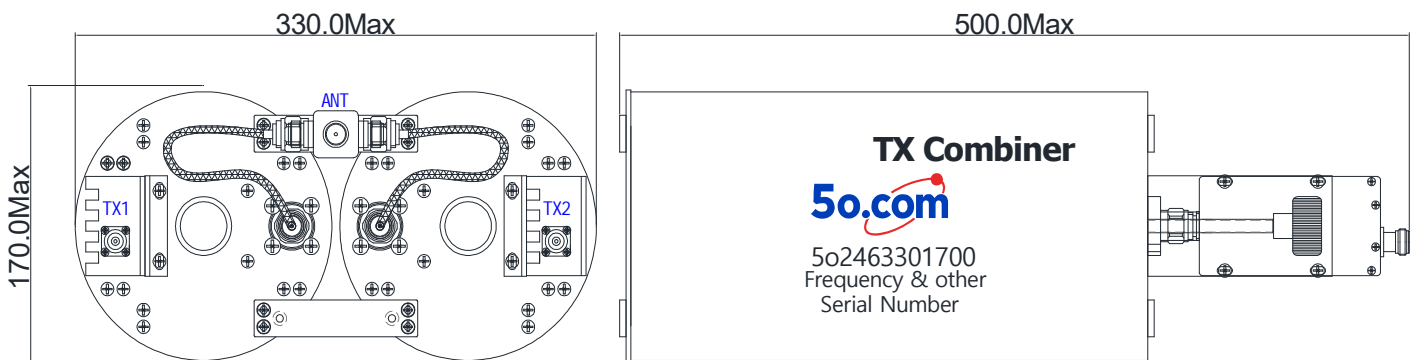

Tolerances: ±2% unless otherwise stated.