

Band Pass Filter 200 ~ 400MHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o2640120212222SK	212 ~ 222	3.0	1.5	20dB @187MHz 20dB @247MHz	SMA Female
5o2640120384394SK	384 ~ 394	3.5	1.5	20dB @359MHz 20dB @419MHz	SMA Female

Basic Specifications

Dimension	40.4*12*10mm	Impedance	50Ω
Power	2W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

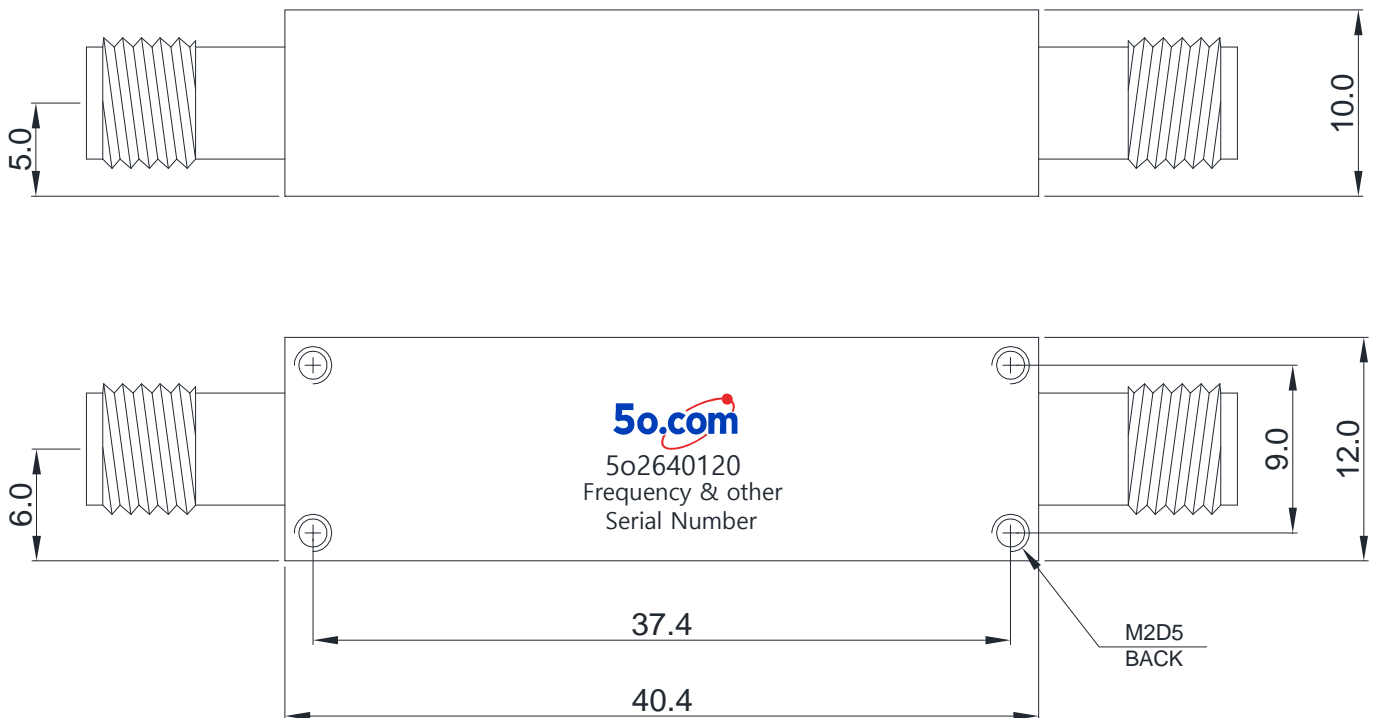

Tolerances: ±2% unless otherwise stated.