

Band Pass Filter 1616 ~ 1627MHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RK Characteristics

Part Number	Pass Band (MHz)	Insertion Loss Max(dB)	Ripple in-band Max(dB)	VSWR Max	Rejection	Connector Type
502680115016161627SK	1616~1627	2.5	1.5	1.3	35dB @DC~1610MHz 35dB @1630~3000MHz	SMA Female
502680115016161627NK	1616~1627	2.5	1.5	1.3	35dB @DC~1610MHz 35dB @1630~3000MHz	N Female

Basic Specifications

Dimension	80*115*43mm	Impedance	50Ω
Power	30W	Operating Temperature	-20~ +60°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

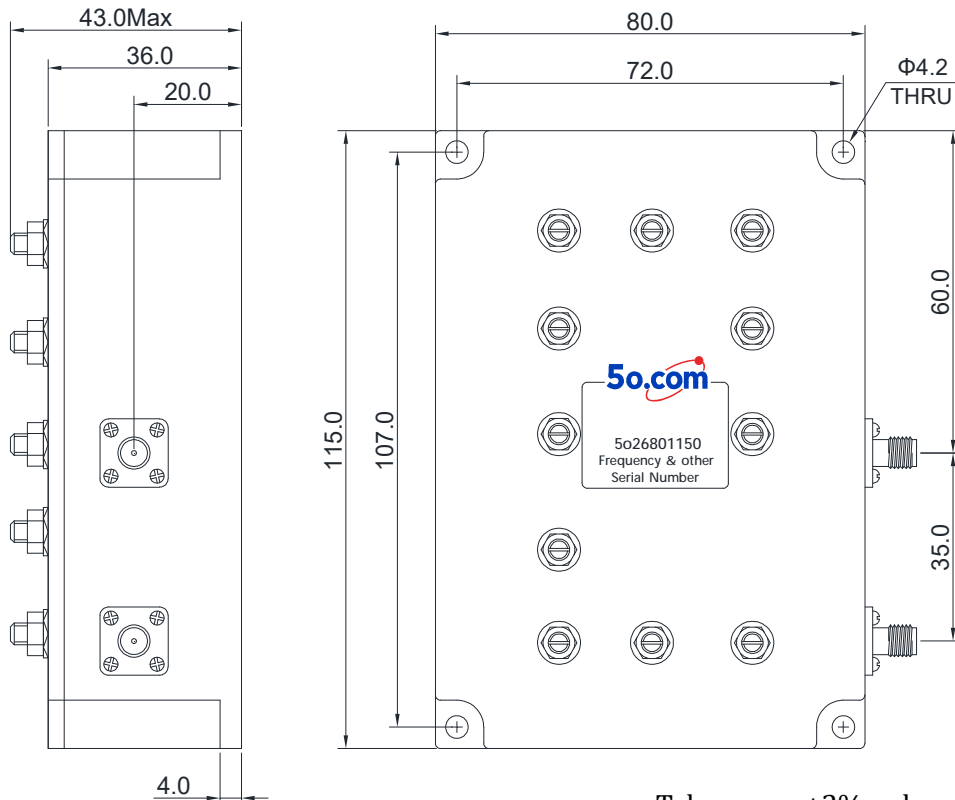

Tolerances: ±2% unless otherwise stated.