

Low Pass Filter DC ~ 108MHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o2735120108SK	DC ~ 108	2.0	1.5	40dB @150~2000MHz	2.92mm Female

Basic Specifications

Dimension	35*12*8mm	Impedance	50Ω
Power	10W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

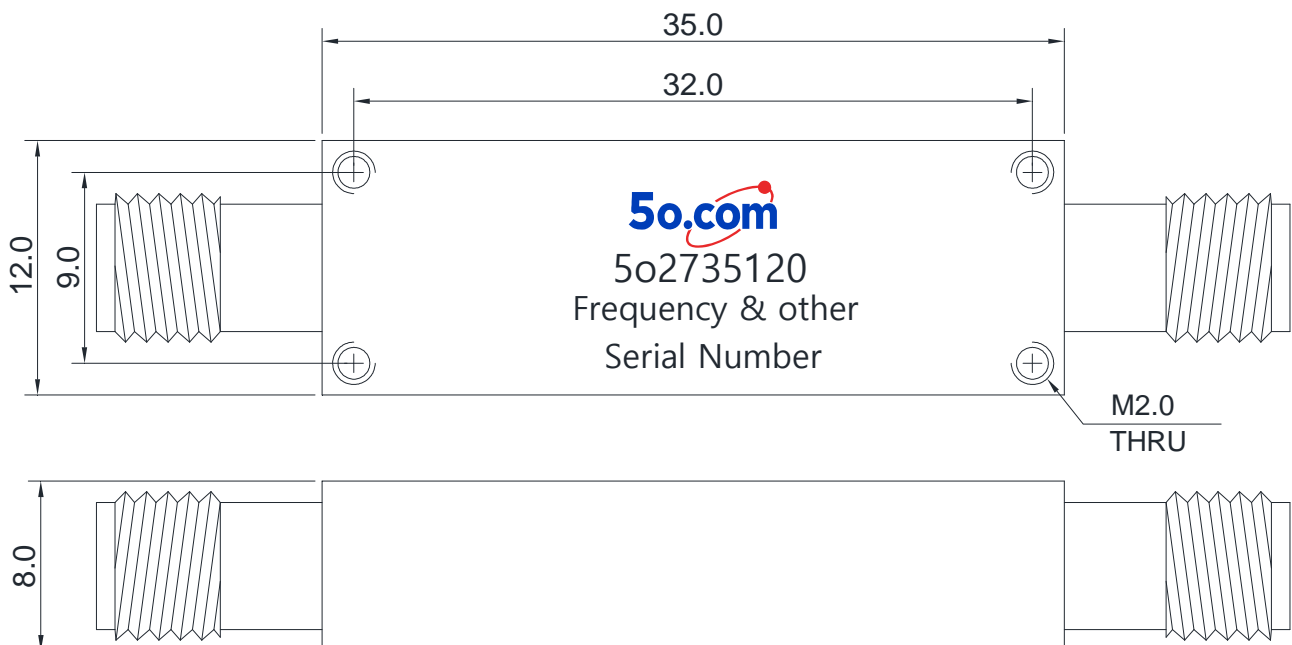

Tolerances: $\pm 2\%$ unless otherwise stated.