

Low Pass Filter 5 ~ 285MHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o27401205285SK	5 ~ 285	2.0	1.5	45dB @330~650MHz	SMA Female

Basic Specifications

Dimension	40.4*12*10mm	Impedance	50Ω
Power	5W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

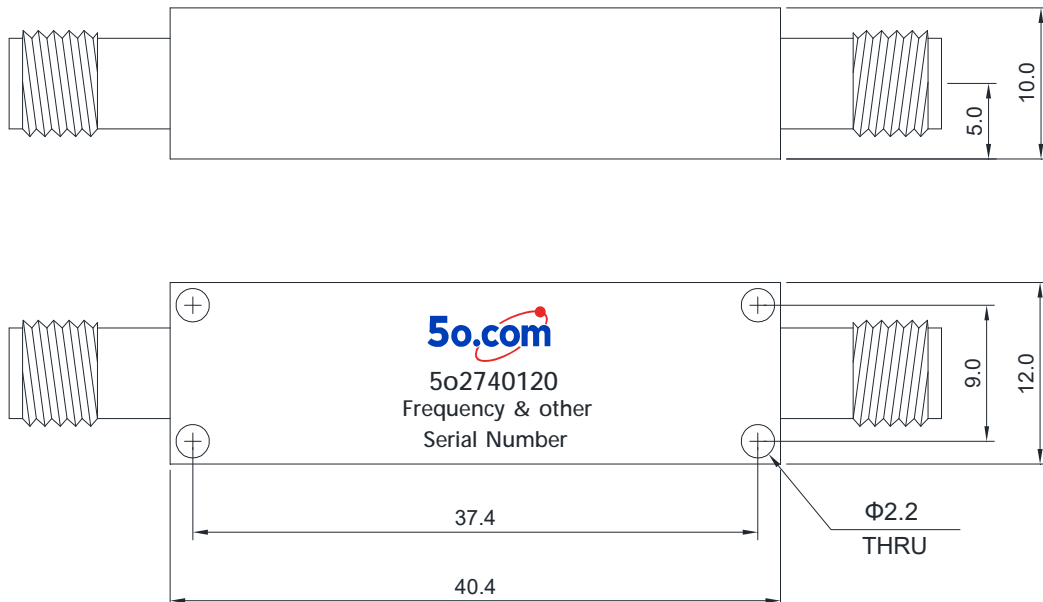

Tolerances: $\pm 2\%$ unless otherwise stated.