

## Low Pass Filter DC ~ 900MHz

### Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


### RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o2788630900SK	DC-900	1.2	1.8	50dB @1.2~2.0GHz	SMA Female

### Basic Specifications

Dimension	88.5*63*12mm	Impedance	50Ω
Power	30W	Operating Temperature	-40 ~ +85°C
Appearance Color	Black	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

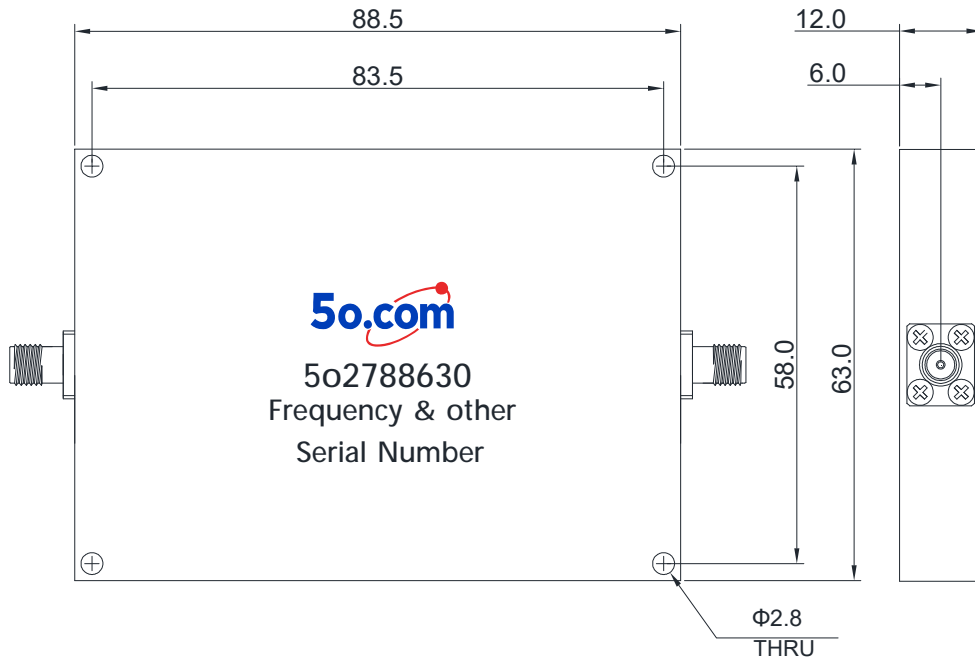

Tolerances: ±2% unless otherwise stated.