

High Pass Filter 6.0 ~ 24.0GHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o2832230624SK	6.0~24.0	2.0dB @6.0~6.3GHz 1.0dB @6.3~24GHz	1.5@6~20GHz 1.8@20~24GHz	60dB @DC~5.4GHz	SMA Female

Basic Specifications

Dimension	32*23*10mm	Impedance	50Ω
Power	15W	Operating Temperature	-55~+85°C
Appearance color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

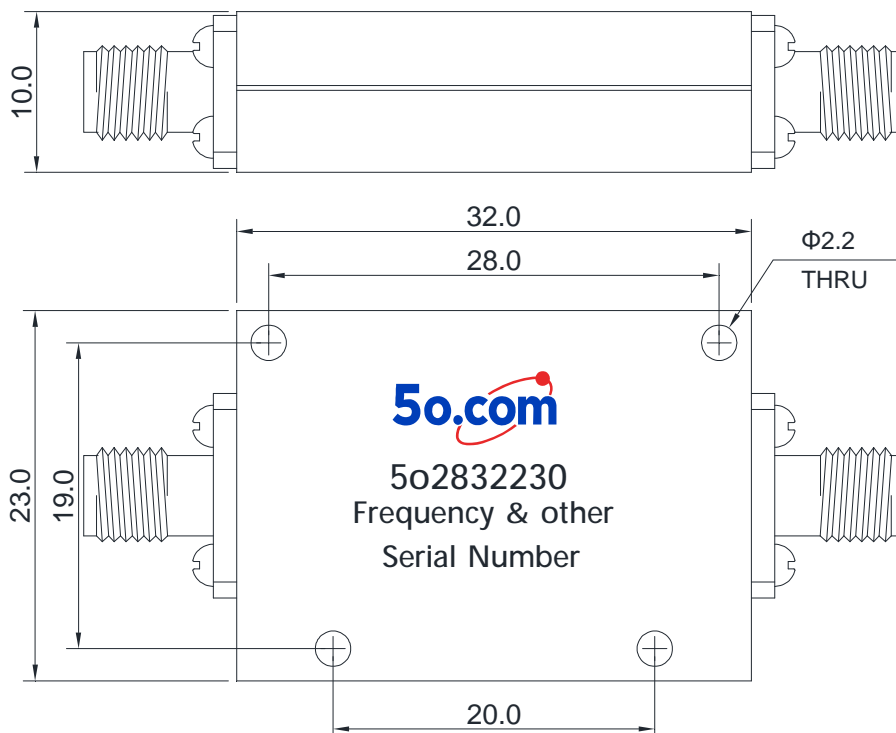

Tolerances: ±2% unless otherwise stated.