

High Pass Filter 2390 ~ 12750MHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o2834300239012750SK	2390 ~ 12750	1.0	1.8	40dB @DC-1900MHz	SMA Female

Basic Specifications

Dimension	34*30*12mm	Impedance	50Ω
Power	10W	Operating Temperature	-40~+85°C
Appearance color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

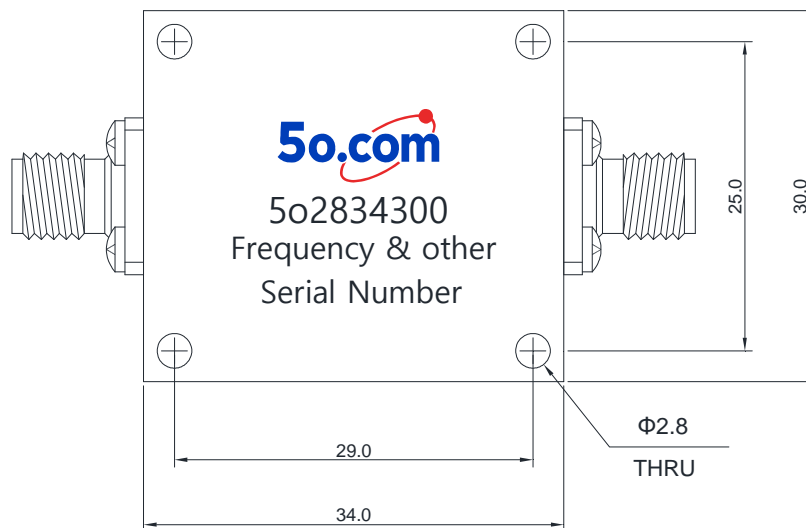

Tolerances: ±2% unless otherwise stated.