

High Pass Filter 2.0 ~ 13.0GHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Connector Type
5o2840220213SK	2.0 ~ 13.0	1.5	1.8	40dB @DC-934MHz	SMA Female
5o284022021275SK	2.0 ~ 12.75	2.0	1.8	60dB @DC-890MHz	SMA Female

Basic Specifications

Dimension	40*22*11mm	Impedance	50Ω
Power	30W	Operating Temperature	-40~+85°C
Appearance color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

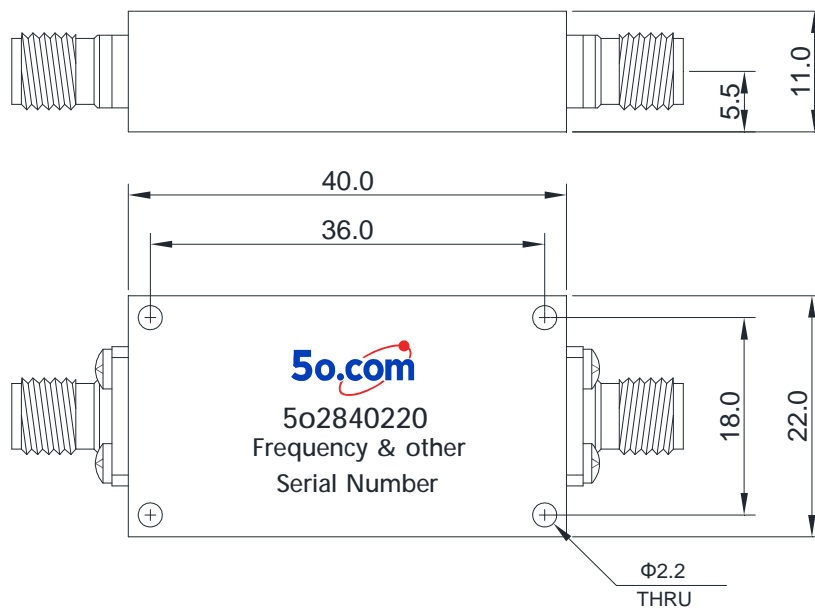

Tolerances: ±2% unless otherwise stated.