

# High Pass Filter 800 ~ 4000MHz

## Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Ripple Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type
5o28719108004000NK	800 ~ 4000	1.2	0.5	60dB @DC-600MHz	1.8	N Female
5o28719108004000SK	800 ~ 4000	1.2	0.5	60dB @DC-600MHz	1.8	SMA Female

## Basic Specifications

Dimension	71*91*22mm	Impedance	50Ω
Power	5W	Operating Temperature	-30 ~ +70°C
Appearance color	Black	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

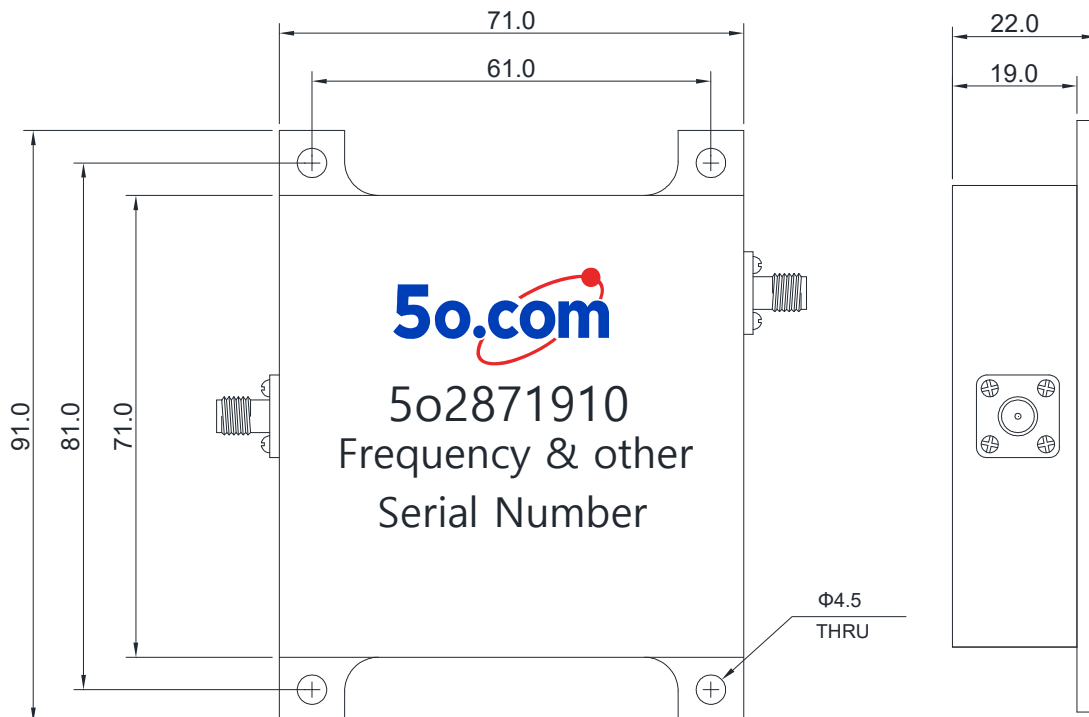

Tolerances: ±2% unless otherwise stated.