

Band Stop Filter 2592 ~ 2598MHz

Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Band Reject Frequency (MHz)	Pass Band Frequency	Band Reject Rejection Min(dB)	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o2912070025922598SK	2592~2598	DC~2580MHz 2610~3000MHz	40	2	1.5	SMA Female

Basic Specifications

Dimension	120*70*18mm	Impedance	50Ω
Power	50W	Operating Temperature	-55~+85°C
Appearance color	Black	Storage Temperature	-55~+125°C

Overall Dimension(mm)

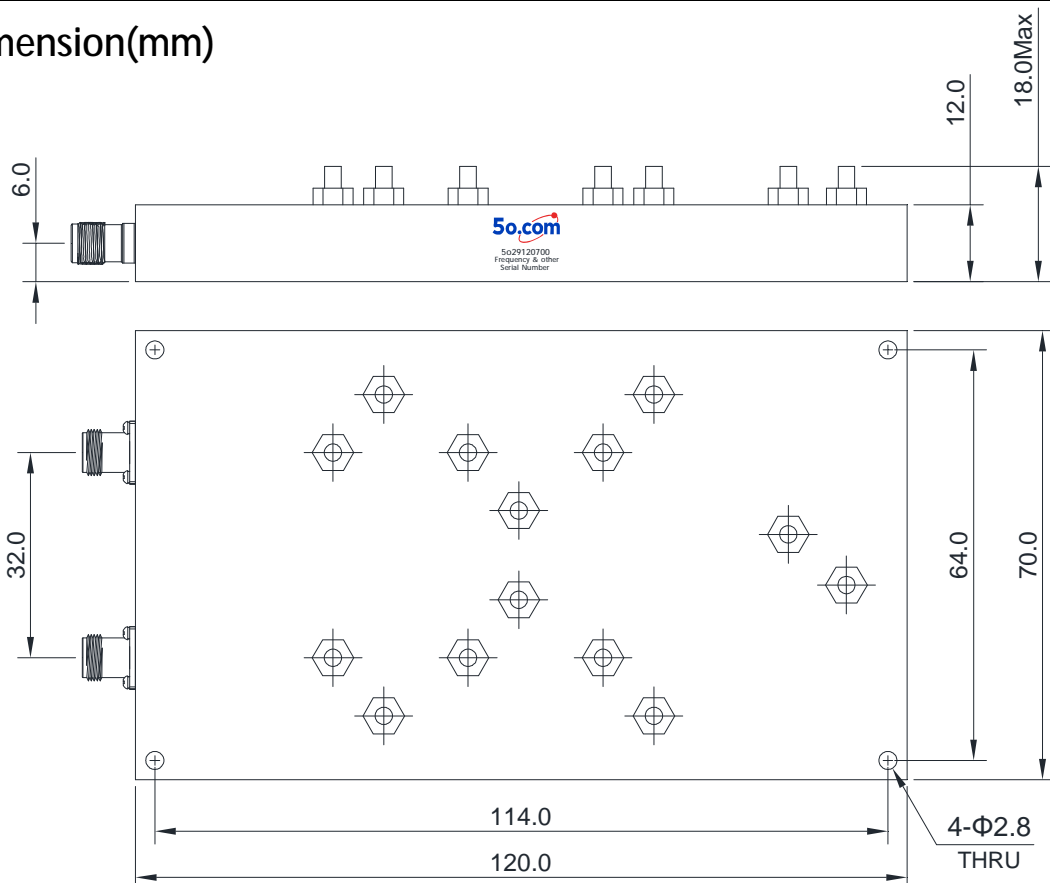

Tolerances: ±2% unless otherwise stated.