

## Band Stop Filter 791 ~ 821MHz

### Application

- ▶ Wireless communication system.
- ▶ Audio processing, image and data acquisition.
- ▶ Biomedical signal processing.
- ▶ Radar and sensors.
- ▶ It supports a one-year standard warranty.


### RF Characteristics

Part Number	Band Reject Frequency (MHz)	Band Reject Rejection Min(dB)	Pass Band Frequency	VSWR Max	Insertion Loss Max(dB)	Connector Type
5o292801040791821SK	791 ~ 821	40	DC~700MHz 832~2000MHz	1.7	1.5	SMA Female
5o292801040791821NK	791 ~ 821	40	DC~700MHz 832~2000MHz	1.7	1.5	N Female
5o292801040791821SKPK1200	791 ~ 821	40	DC~700MHz 832~1200MHz	1.5	1.5	SMA Female

### Basic Specifications

Dimension	280*104*48mm	Impedance	50Ω
Power	100W	Operating Temperature	-55~+85°C
Appearance color	Black	Storage Temperature	-55~+125°C

### Overall Dimension(mm)

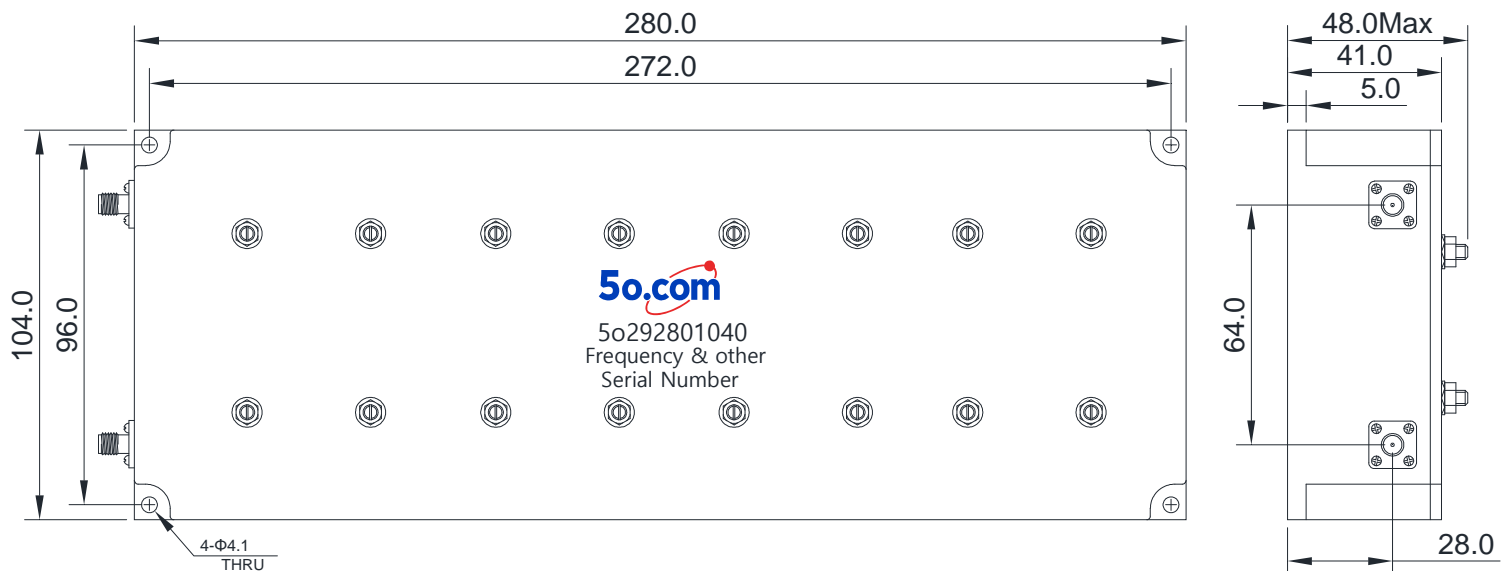

Tolerances: ±2% unless otherwise stated.