

2 way Combiner / Hybrid Coupler 136 ~ 174MHz

Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power (W)
5o2T150164450136174NK	136 ~ 174	0.3 (Coupling 3dB)	28	1.15	N Female	200(2x100)
5o2T150164450136174SK	136 ~ 174	0.3 (Coupling 3dB)	28	1.15	SMA Female	100(2x50)

Basic Specifications

Dimension	164*45*50mm	Operating Temperature	-40 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension(mm)

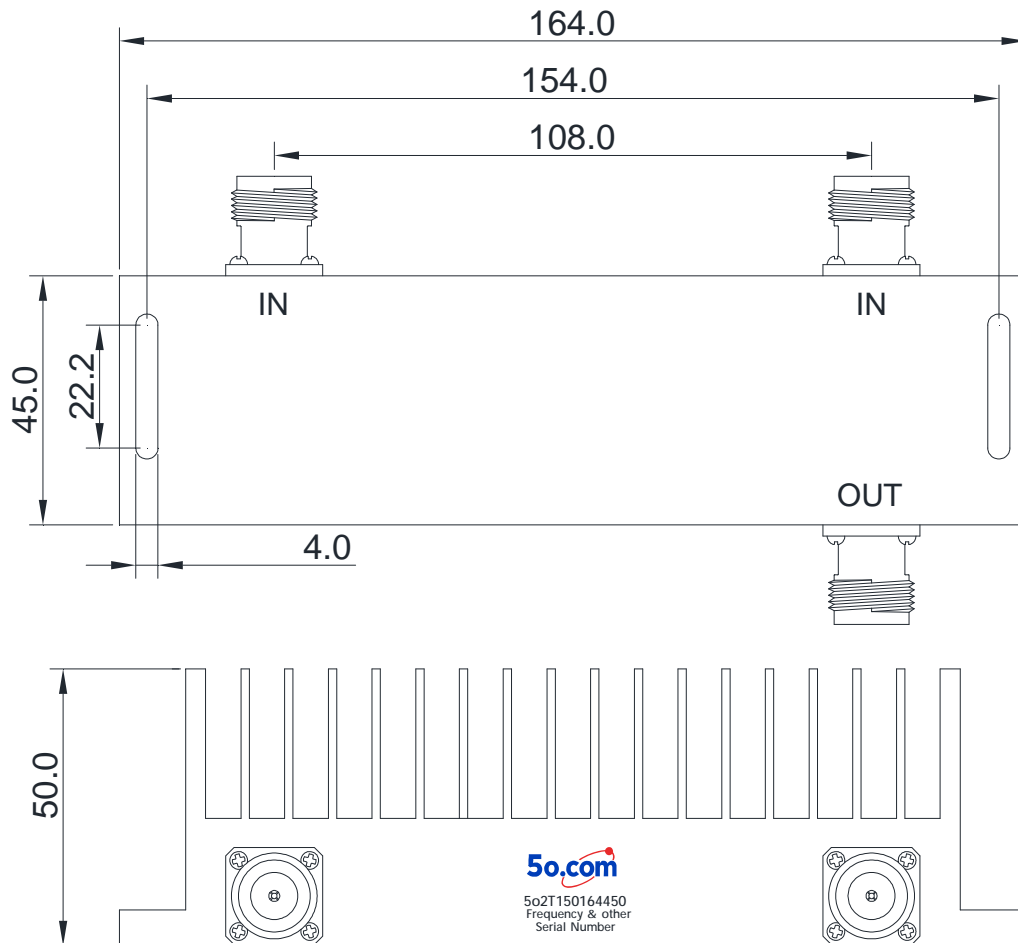

Tolerances: $\pm 2\%$ unless otherwise stated.