

2 way Combiner / Hybrid Coupler 70 ~ 174MHz

Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power (W)
5o2T150422165070174NK	70 ~ 174	0.5 (Coupling 3dB)	25	1.4	N Female	200(2x100)
5o2T150422165070174SK	70 ~ 174	0.5 (Coupling 3dB)	25	1.4	SMA Female	100(2x50)

Basic Specifications

Dimension	422*165*81mm	Operating Temperature	-30 ~ +60°C
Impedance	50Ω	Storage Temperature	-55~+125°C

Overall Dimension(mm)

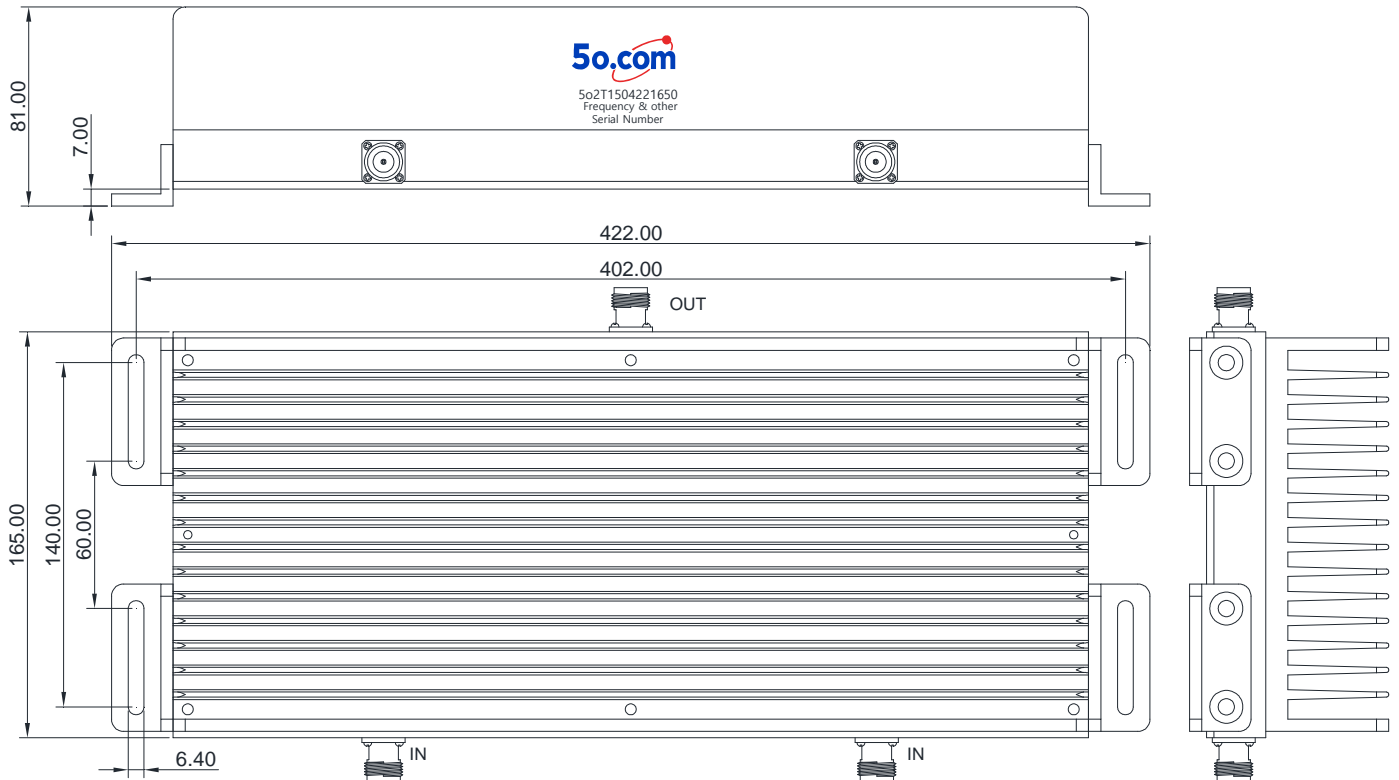

Tolerances: ±2% unless otherwise stated.