

# 2 way Combiner / Hybrid Coupler 350 ~ 520MHz

## Application

- ▶ Multi-system shared antenna feed system..
- ▶ Base station and repeater system.
- ▶ Indoor distribution system.
- ▶ Radio intercom system.
- ▶ It supports a one-year standard warranty.


## RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power (W)
5o2T250148440350520NK	350~ 520	0.5 (Coupling 3dB)	25	1.2	N Female	200(2x100)
5o2T250148440350520SK	350 ~ 520	0.5 (Coupling 3dB)	25	1.2	SMA Female	100(2x50)
5o2T250148440400470NK	400~ 470	0.3 (Coupling 3dB)	26	1.2	N Female	200(2x100)
5o2T250148440400470SK	400~ 470	0.3 (Coupling 3dB)	26	1.2	SMA Female	100(2x50)

## Basic Specifications

Dimension	142*39*21mm	Operating Temperature	-40 ~ +85°C
Impedance	50Ω	Storage Temperature	-55~+125°C

## Overall Dimension(mm)

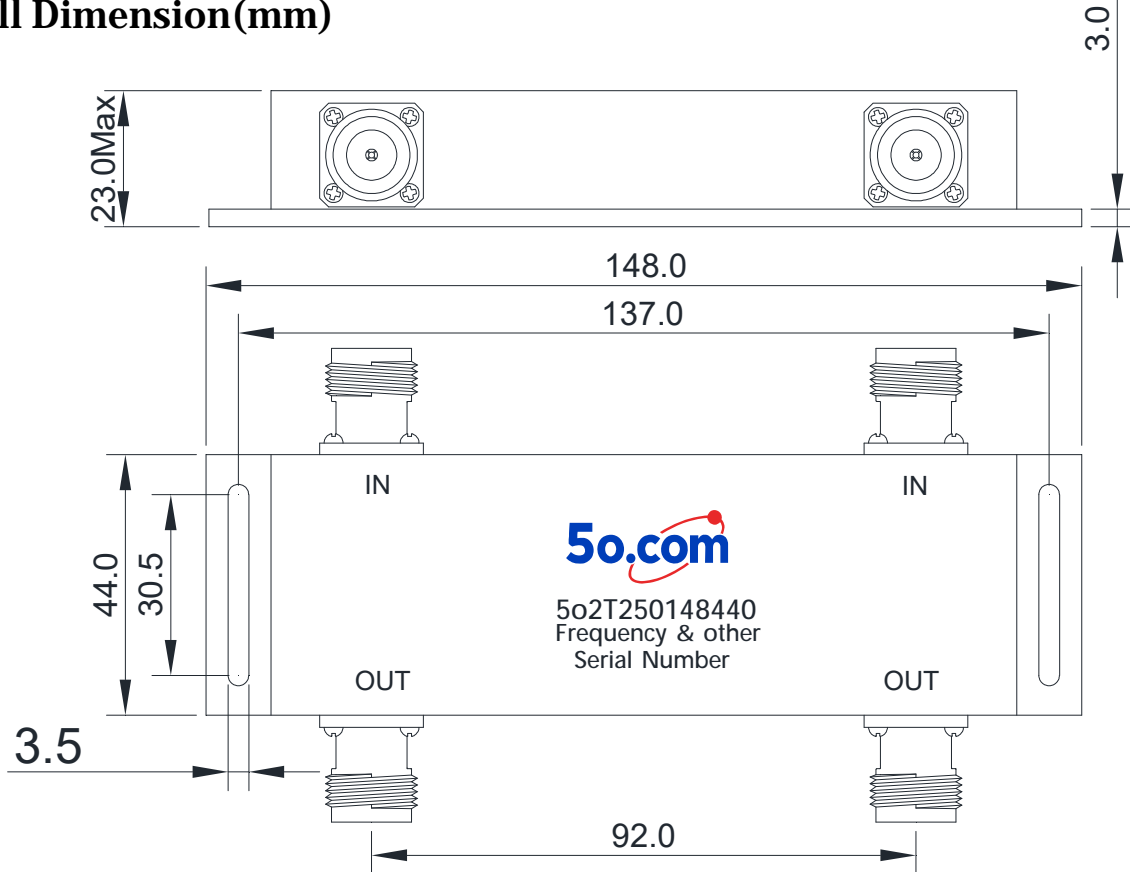

Tolerances: ±2% unless otherwise stated.