2 way Combiner / Hybrid Coupler 175 ~ 400MHz

Application

- ▶Multi-system shared antenna feed system..
- ▶Base station and repeater system.
- ▶Indoor distribution system.
- ▶Radio intercom system.
- ▶It supports a one-year standard warranty.

RF Characteristics

Part Number	Frequency Range (MHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Connector Type	Power(W)
5o2T250230400175300NK	175 ~ 300	0.8 (Coupling 3dB)	23	1.3	N Female	200(2x100)
5o2T250230400175300SK	175 ~ 300	0.8 (Coupling 3dB)	23	1.3	SMA Female	100(2x50)
5o2T250230400225400NK	225~ 400	0.8 (Coupling 3dB)	23	1.3	N Female	200(2x100)
5o2T250230400225400SK	225~ 400	0.8 (Coupling 3dB)	23	1.3	SMA Female	100(2x50)

Basic Specifications

Dimension	230*40*26.5mm	Operating Temperature	-20 ~ +70℃
Impedance	50Ω	Storage Temperature	-55~+125℃

Overall Dimension(mm)

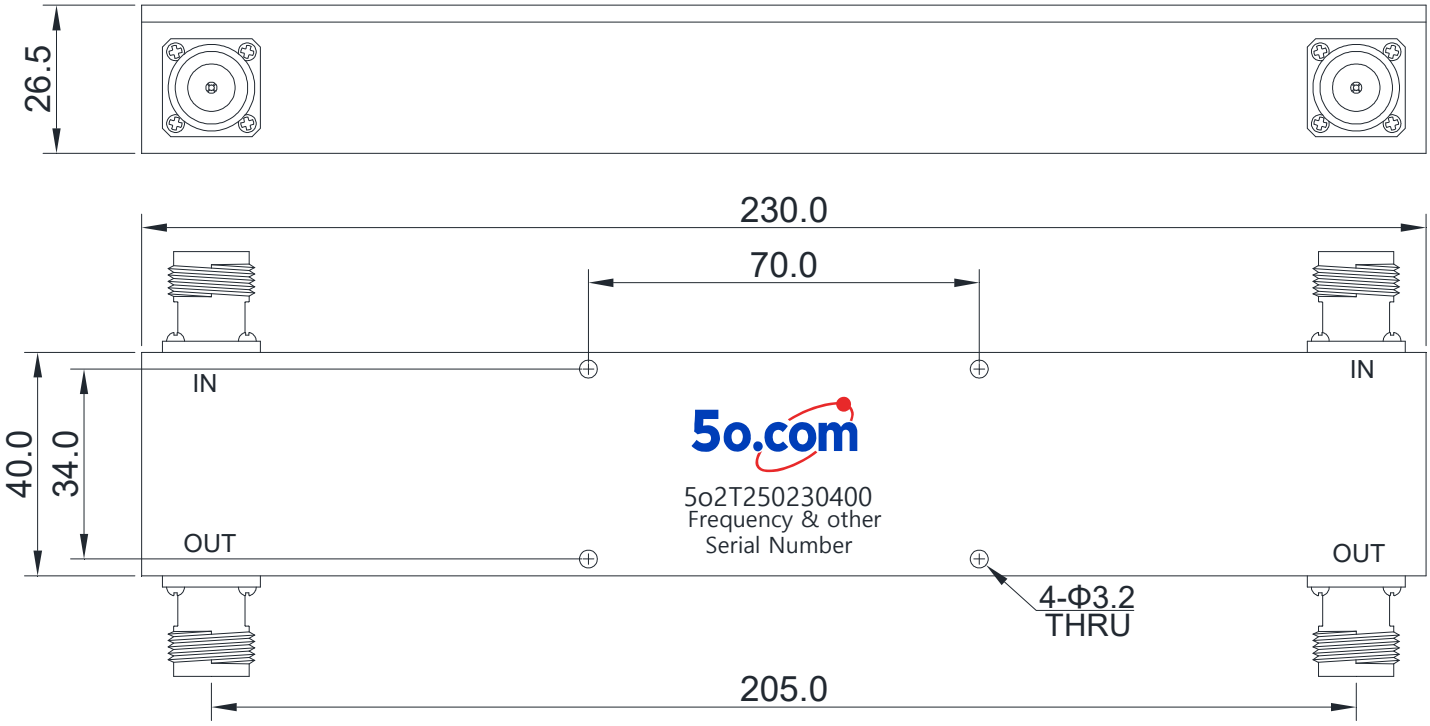

Tolerances: ±2% unless otherwise stated.