

2 Way Power Divider 136 ~ 960MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o311161080136960NK	136 ~ 960	22	1.25	0.6(Split 3.0dB)	±3°	±0.4dB	N Female
5o311161080136960SK	136 ~ 960	22	1.25	0.6(Split 3.0dB)	±3°	±0.4dB	SMA Female

Basic Specifications

Dimension	116.5*108.1*21mm	Impedance	50Ω
Splitter Power	50W	Operating Temperature	-40 ~ +85°C
Combiner Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

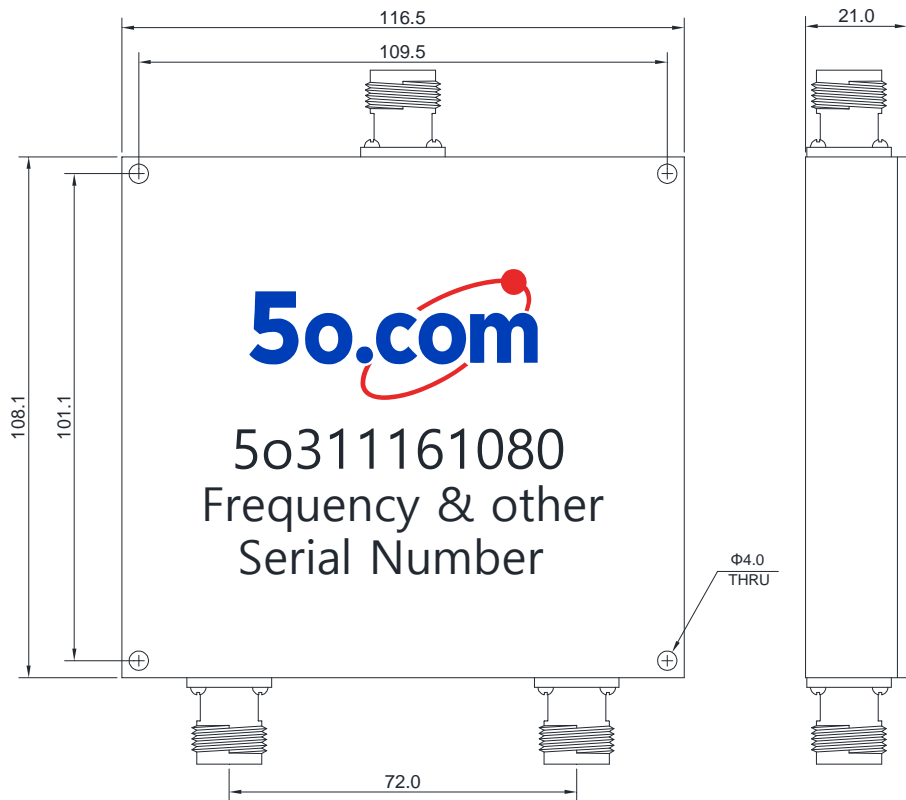

Tolerances: ±2% unless otherwise stated.