

2 Way Power Divider 70 ~ 520MHz

Application

- ▶ Wireless communication system.
- ▶ Military, Space and Commercial applications.
- ▶ Radar and satellite systems.
- ▶ Testing and measuring equipment.
- ▶ It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o31158122070T520NK	70 ~ 520	20	1.3	0.7(Split 3dB)	±3°	±0.3dB	N Female
5o31158122070T520SK	70 ~ 520	20	1.3	0.7(Split 3dB)	±3°	±0.3dB	SMA Female

Basic Specifications

Dimension	158*122*24mm	Impedance	50Ω
Splitter Power	50W	Operating Temperature	-20 ~ +70°C
Combiner Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

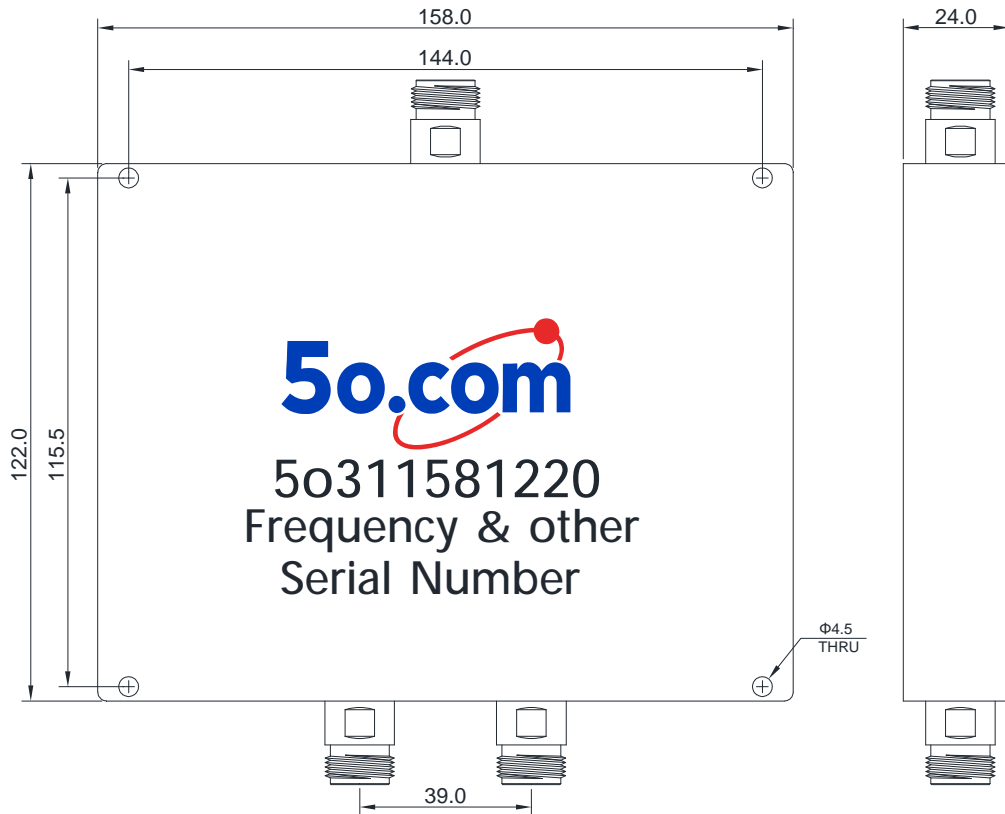

Tolerances: ±2% unless otherwise stated.