

2 Way Power Divider 350 ~6000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Input Max	Ripple Max(dB)	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o31427303506000SK	350~6000	16	1.5	1.2	1.8(Split 3dB)	±5°	±0.4dB	SMA Female

Basic Specifications

Dimension	42*73.5*11.5mm	Impedance	50Ω
Splitter Power	25W	Operating Temperature	-55 ~ +80°C
Combiner Power	1W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

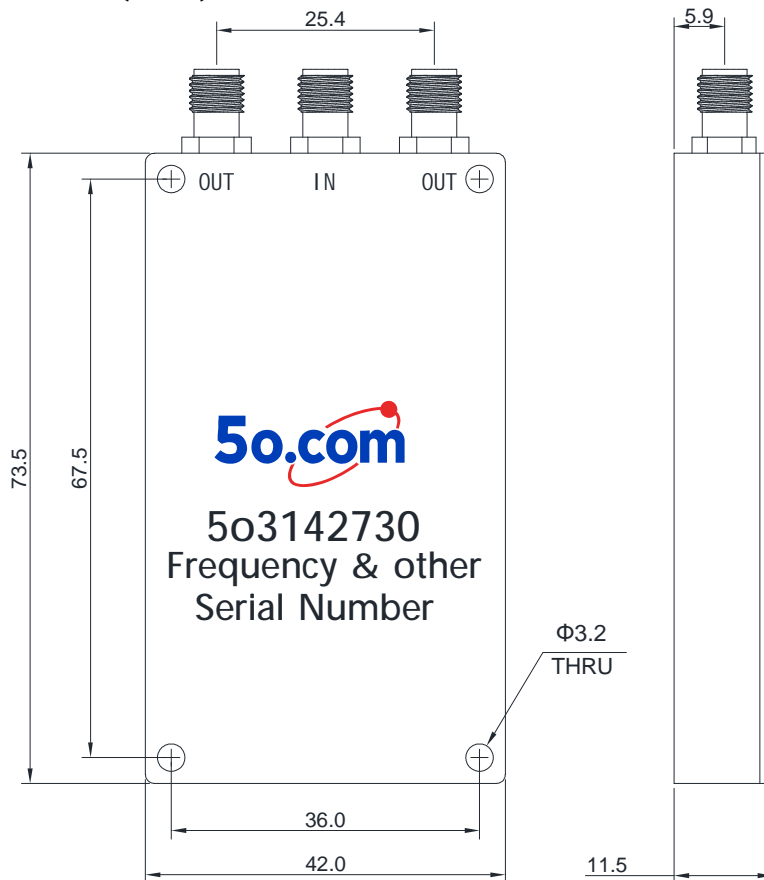

Tolerances: ±2% unless otherwise stated.