

2 Way Power Divider 100 ~ 2000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o316311001002000SK	100 ~ 2000	18	1.4	1.3	1.8dB(Split 3dB)	±2°	±0.2dB	SMA Female

Basic Specifications

Dimension	63*110*12mm	Impedance	50Ω
Splitter Power	30W	Operating Temperature	-40 ~ +85°C
Combiner Power	2W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

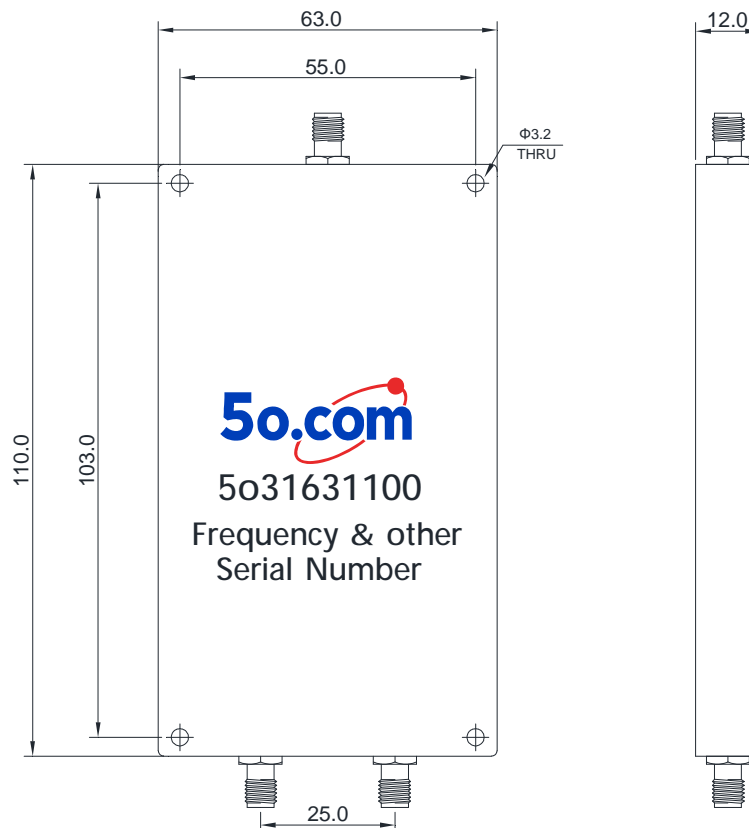

Tolerances: ±2% unless otherwise stated.