

3 Way Power Divider 2.0 ~ 8.0GHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o323766028SK	2.0 ~ 8.0	18	1.4	1.3	1.0(Split 4.8dB)	±5°	±0.6dB	SMA Female

Basic Specifications

Dimension	37.5*66.5*10mm	Impedance	50Ω
Splitter Power	30W	Operating Temperature	-55 ~ +85°C
Combiner Power	3W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

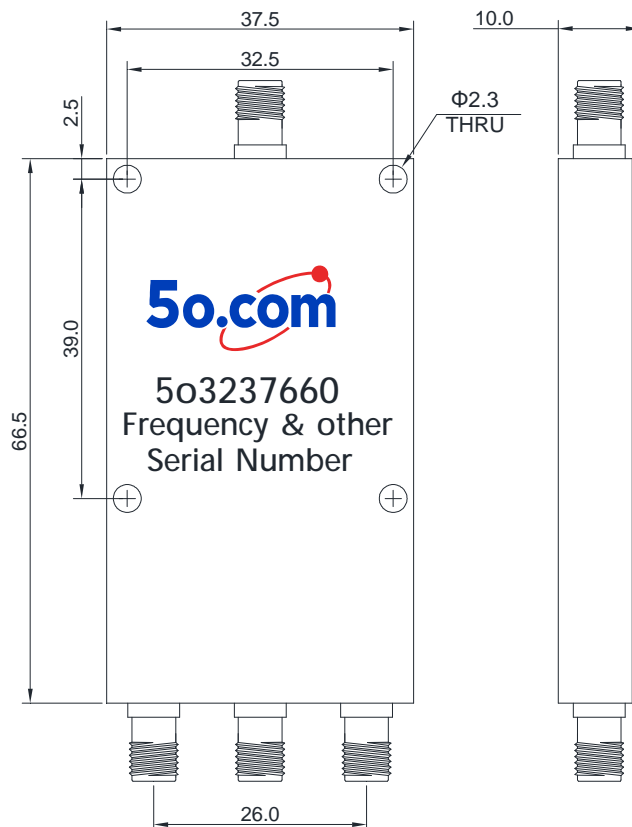

Tolerances: ±2% unless otherwise stated.