

3 Way Power Divider 2.0 ~ 18.0GHz

Application

Ø Wireless communication system.

Ø Military, Space and Commercial applications.

Ø Radar and satellite systems.

Ø Testing and measuring equipment.

Ø It supports a one-year standard warranty.


RF Characteristics

Part Number	Frequency Range (GHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o3239700218SF	2.0 ~ 18.0	18	1.4	1.3	1.0(Split 4.8dB)	±5°	±6dB	SMA Female

Basic Specifications

Dimension	39*70*10mm	Impedance	50Ω
Splitter Power	10W	Operating Temperature	-45 ~ +85°C
Combiner Power	3W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

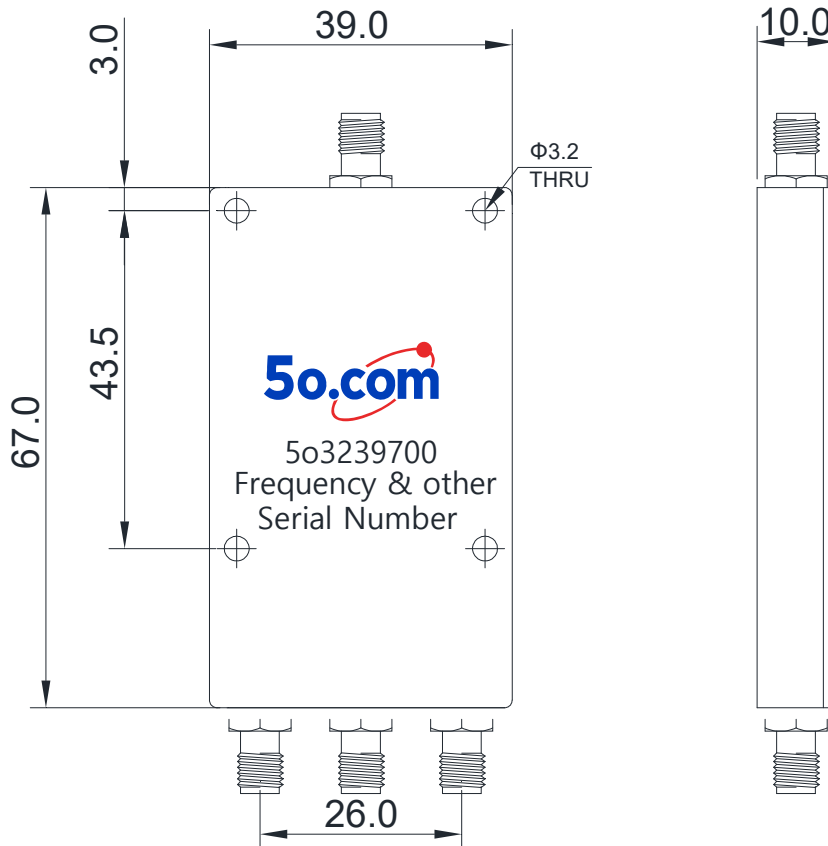

Tolerances: ±2% unless otherwise stated.