

3 Way Power Divider 5 ~ 1000MHz

Application

- ▶ Wireless communication system.
- ▶ Radar and satellite systems.
- ▶ It supports a one-year standard warranty.
- ▶ Military, Space and Commercial applications.
- ▶ Testing and measuring equipment.


RF Characteristics

Part Number	Frequency Range (MHz)	Isolation Min(dB)	VSWR Input Max	VSWR Output Max	Insertion Loss Max(dB)	Phase Unbalance	Amplitude Unbalance	Connector Type
5o324545051000SK	5 ~ 1000	20	1.7	1.4	3.6(Split 4.8dB)	±12°	±1.0dB	SMA Female

Basic Specifications

Dimension	45*45*12mm	Impedance	50Ω
Splitter Power	2W	Operating Temperature	-40~ +85°C
Combiner Power	1W	Storage Temperature	-55~+125°C

Overall Dimension(mm)

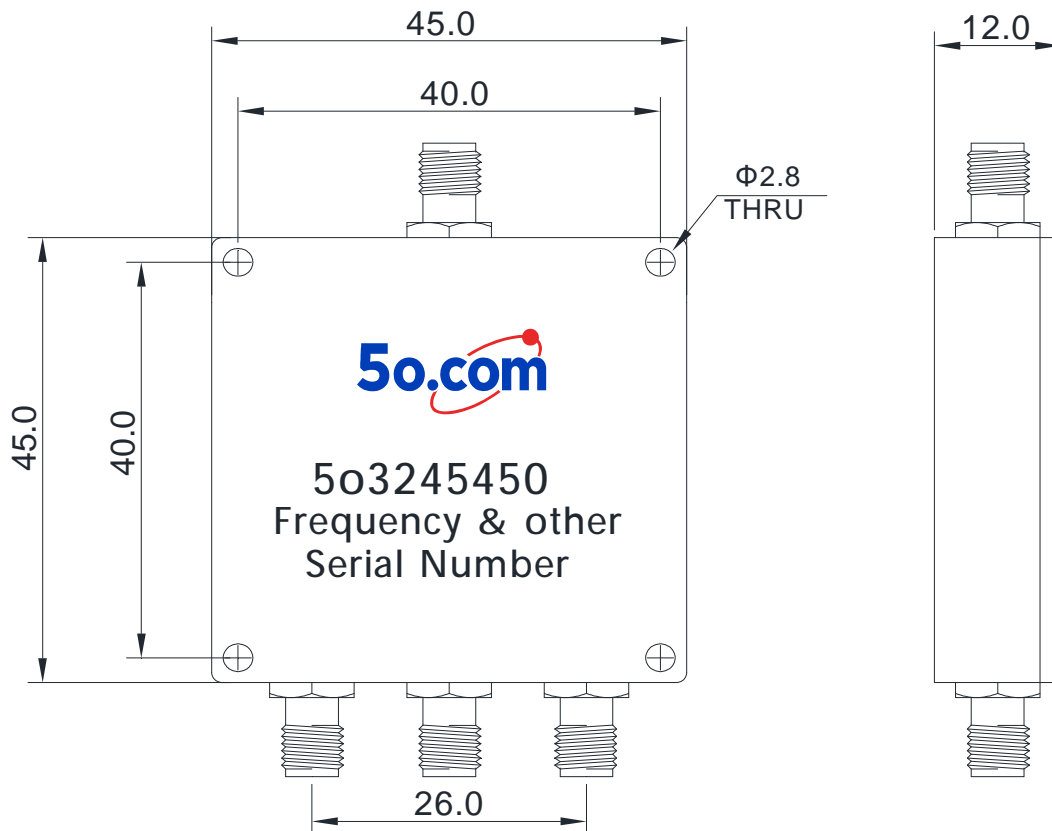

Tolerances: ±2% unless otherwise stated.